



BRAND

Visual Comfort Architectural

DESCRIPTION

Entra is easy to configure with a complete feature set that offers flexibility without an overwhelming list of options. The 3 Inch Round Adjustable Downlight and Wall Wash IC New Construction Housing is offered with high (18 watt) or low (12 watt) output, four color temperature and Warm Dim (3000K - 1800K) options, and 20-40-65 degree interchangeable optics with hot aiming (30 degree tilt, 359 degree rotation). LED module ships with 40 degree optic installed. Adjust to 30 degree tilt for wall wash applications. 4 inch cut out. Dimmable with a Triac, electronic low voltage (ELV) or 0-10V dimmer, sold separately. ETL listed. Energy Star. Suitable for damp locations. Can be used to comply with CEC 2016 Title 24 Part 6. A complete fixture includes a housing and trim (with or without flange), sold separately




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.2"W x 3.5"H x 7.3"D
INTEGRATED LED MODULE	
LAMP	1 x LED/12W/120V LED



Technical Information

LUMINOUS FLUX	980 lumens
LUMENS/WATT	81.67
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	65°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
HOUSING TYPE	New construction IC Airtight
APERTURE SHAPE	Round
SPEC #	ELE892108

LOW OUTPUT



HIGH OUTPUT

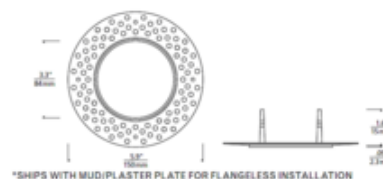

*SHIPS WITH MUD/PLASTER PLATE FOR FLANGELESS INSTALLATION

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE