

# Lightology

lightology.com  
866-954-4489  
04-21-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **WAC895856**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Ocularc 1 inch Square Adjustable Downlight / Housing By WAC Lighting



### Description

The Oculux 1 Inch Square Downlight with Adjustable Trim and LED light engine is an architectural grade IC-Rated New Construction or Remodel all-in-one unit. May be reconfigured in the field for remodel. Trim available in powder coat White or electroplated Brushed Nickel finish. Single spot light source with 0-20 degree adjustability and 35 degree visual cutoff. Offered in 2700K or 3000K color temperature with 25 or 45 degree beam angle. Ceiling thickness: .50 to 1 inch. Cutout: 2.5 inch. ETL listed. Suitable for damp locations. Energy Star. Title 24/JA8 compliant. Dimmable with a Triac or electronic low voltage (ELV) dimmer, sold separately.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Brushed Nickel
WATTAGE	8W
DIMMER	Low Voltage Electronic
DIMENSIONS	9.5"W x 4"H x 8.56"D
INTEGRATED LED MODULE	1 x LED/8W/120V LED
COUNTRY OF ORIGIN	China

### Technical Information

APERTURE SIZE	1.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	.4"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	25°
COLOR RENDERING	.90 CRI
LAMP COLOR	2700K
LUMENS/WATT	85.00
LUMINOUS FLUX	680 lumens



Shown in brushed nickel

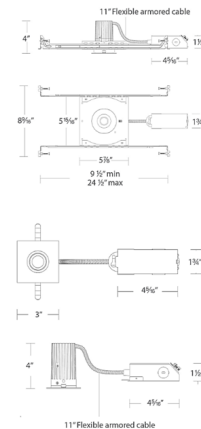

CLICK TO VIEW PRODUCT

Notes: