

Lightology

lightology.com
866-954-4489
07-06-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **WAC896027**
Approved On: _____ Approved By: _____

Ocularc 1IN Round Open Reflector Downlight / Housing

By WAC Lighting



Description

The Oculux 1 Inch Round Downlight with Open Reflector Trim and LED light engine is an architectural grade IC-Rated New Construction or Remodel all-in-one unit. May be reconfigured in the field for remodel. Trim available in powder coat White or Haze/White, or electroplated Brushed Nickel finish. Single spot light source with 35 degree visual cutoff. Offered in 2700K or 3000K color temperature with 25 or 45 degree beam angle. Ceiling thickness: .50 to 1 inch. Cutout: 2.5 inch. ETL listed. Suitable for wet locations. Energy Star. Title 24/JA8 compliant. Dimmable with a Triac or electronic low voltage (ELV) dimmer, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White / Haze Reflector
WATTAGE 8W
DIMMER Low Voltage Electronic
DIMENSIONS 9.5"W x 4"H x 8.56"D
INTEGRATED LED MODULE 1 x LED/8W/120V LED
COUNTRY OF ORIGIN China

Technical Information

APERTURE SIZE 1.000"
APERTURE SHAPE Round
HOUSING HEIGHT 4"
HOUSING TYPE New construction IC Airtight
CEILING TYPE Drywall with Trim
FUNCTION Downlight
LAMP LIFE 50000 hours
BEAM ANGLE 25°
COLOR RENDERING 90 CRI
LAMP COLOR 2700K
LUMENS/WATT 77.50
LUMINOUS FLUX 620 lumens



Shown in white / haze reflector

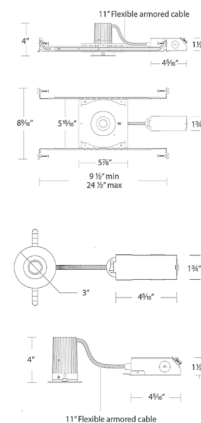

CLICK TO VIEW PRODUCT

Notes: