

Lightology

lightology.com
866-954-4489
07-06-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **WAC896040**
Approved On: _____ Approved By: _____

Ocularc 11N Square Open Reflector Downlight / Housing

By WAC Lighting



Description

The Oculux 1 Inch Square Downlight with Open Reflector Trim and LED light engine is an architectural grade IC-Rated New Construction or Remodel all-in-one unit. May be reconfigured in the field for remodel. Trim available in powder coat White, Black or White/Haze, or electroplated Brushed Nickel finish. Single spot light source with 35 degree visual cutoff. Offered in 2700K or 3000K color temperature with 25 or 45 degree beam angle. Ceiling thickness: .50 to 1 inch. Cutout: 2.5 inch. Dimmable with a Triac or electronic low voltage (ELV) dimmer, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White
WATTAGE 7.5W
DIMMER Low Voltage Electronic
DIMENSIONS 9.5"W x 4"H x 8.56"D
INTEGRATED LED MODULE 1 x LED/7.5W/120V LED
COUNTRY OF ORIGIN China

Technical Information

APERTURE SIZE 1.000"
APERTURE SHAPE Square
HOUSING HEIGHT 4"
HOUSING TYPE New construction IC Airtight
CEILING TYPE Drywall with Trim
FUNCTION Downlight
LAMP LIFE 50000 hours
BEAM ANGLE 25°
COLOR RENDERING 90 CRI
LAMP COLOR 2700K
LUMENS/WATT 82.00
LUMINOUS FLUX 615 lumens



Shown in white

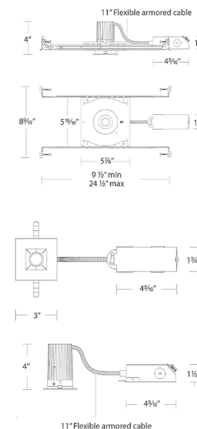

CLICK TO VIEW PRODUCT

Notes: