

DESIGNER


Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Cirrus MIYO (make-it-your-own) Rectangle High Efficiency LED Suspension is combination of clean, linear channels resulting in a geometric design. Features 5 watts per foot in a number of color temperature options (including Warm Dim) in an 8 inch width x 37 or 49 inch length. Available in Satin Nickel finish with Satin Nickel wires and connectors, or Black with black wires. An 8 inch canopy is supplied on lengths over 30 inches. Includes a 120VAC input, 24VDC Class 2 output; ELV power supply and 10 foot field adjustable suspension cables. Dimmable with a low voltage electronic (ELV) dimmer, sold separately.

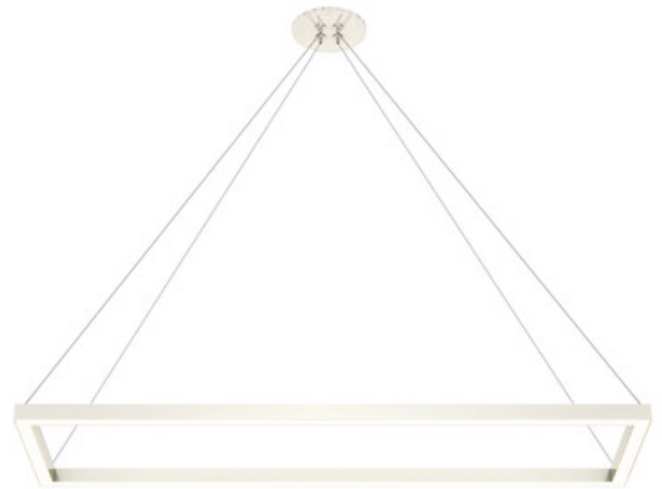


Shown in: Satin Nickel

| | |
|------------------------------|------------------------|
| SHADE COLOR | N/A |
| BODY FINISH | Satin Nickel |
| WATTAGE | 35W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 37"L x 8"W x 0.9"H |
| INTEGRATED LED MODULE | |
| LAMP | 7 x LED/5W/120V LED |

Technical Information

| | |
|------------------------|-------------|
| LUMINOUS FLUX | 2678 lumens |
| LUMENS/WATT | 535.60 |
| LAMP COLOR | 3000K |
| COLOR RENDERING | 95 CRI |
| BEAM ANGLE | 100° |

SPEC # EDG898175

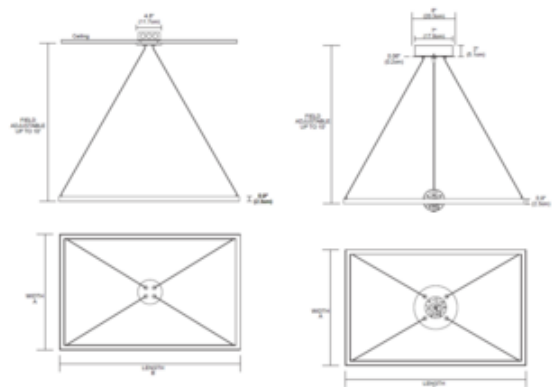

| Nominal Length & Spacing | Nominal Length & Spacing | Dia. & Diameter | Dia. & Diameter | Total Wattage (3000K) | | Voltage (VAC) | Total Lumens (3000K) | Voltage (VDC) | Total Lumens (3000K) |
|--------------------------|--------------------------|-----------------|-----------------|-----------------------|-------|---------------|----------------------|---------------|----------------------|
| | | | | 3000K | 4000K | | | | |
| 4 | 12 | 8.12 | 12 | 15 | 15 | 120V | 100 | 24 | 1000 |
| 6 | 18 | 12.18 | 18 | 22 | 22 | 120V | 150 | 36 | 1500 |
| 8 | 24 | 16.24 | 24 | 30 | 30 | 120V | 200 | 48 | 2000 |
| 10 | 30 | 20.30 | 30 | 37 | 37 | 120V | 250 | 60 | 2500 |
| 12 | 36 | 24.36 | 36 | 45 | 45 | 120V | 300 | 72 | 3000 |
| 14 | 42 | 28.42 | 42 | 52 | 52 | 120V | 350 | 84 | 3500 |
| 16 | 48 | 32.48 | 48 | 60 | 60 | 120V | 400 | 96 | 4000 |
| 18 | 54 | 36.54 | 54 | 67 | 67 | 120V | 450 | 108 | 4500 |
| 20 | 60 | 40.60 | 60 | 75 | 75 | 120V | 500 | 120 | 5000 |
| 22 | 66 | 44.66 | 66 | 82 | 82 | 120V | 550 | 132 | 5500 |
| 24 | 72 | 48.72 | 72 | 90 | 90 | 120V | 600 | 144 | 6000 |
| 26 | 78 | 52.78 | 78 | 97 | 97 | 120V | 650 | 156 | 6500 |
| 28 | 84 | 56.84 | 84 | 105 | 105 | 120V | 700 | 168 | 7000 |
| 30 | 90 | 60.90 | 90 | 112 | 112 | 120V | 750 | 180 | 7500 |
| 32 | 96 | 64.96 | 96 | 120 | 120 | 120V | 800 | 192 | 8000 |
| 34 | 102 | 69.02 | 102 | 127 | 127 | 120V | 850 | 204 | 8500 |
| 36 | 108 | 73.08 | 108 | 135 | 135 | 120V | 900 | 216 | 9000 |
| 38 | 114 | 77.14 | 114 | 142 | 142 | 120V | 950 | 228 | 9500 |
| 40 | 120 | 81.20 | 120 | 150 | 150 | 120V | 1000 | 240 | 10000 |
| 42 | 126 | 85.26 | 126 | 157 | 157 | 120V | 1050 | 252 | 10500 |
| 44 | 132 | 89.32 | 132 | 165 | 165 | 120V | 1100 | 264 | 11000 |
| 46 | 138 | 93.38 | 138 | 172 | 172 | 120V | 1150 | 276 | 11500 |
| 48 | 144 | 97.44 | 144 | 180 | 180 | 120V | 1200 | 288 | 12000 |

| | | | | |
|---------|---------|--------------|-------------|------|
| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
| | | | | |