

# Lightology

lightology.com  
866-954-4489  
04-24-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG898189**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## MIYO Cirrus Rectangle Warm Dim Suspension w/ Center Power By PureEdge Lighting



### Description


The Cirrus MIYO (Make-It-Your-Own) Rectangle High Efficiency LED Suspension with Lit Corners is a combination of clean, linear channels resulting in a geometric design. Features 5 watts per foot in Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature with a high efficiency lens with 100 degree beam spread. Available in a 10 inch width x 37 or 49 inch length. Supplied with 10 foot field adjustable suspension cables. Includes a 120V input, 24VDC Class 2 output ELV power supply which fits inside 4 or 8 inch canopy (depending upon length). Dimmable with a low voltate electronic (ELV) dimmer, sold separately.

### Specifications


COLOR . . . . . N/A  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 40W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 37"L x 10"W x 0.9"H  
 INTEGRATED LED MODULE . . . . . 8 x LED/5W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 BEAM ANGLE . . . . . 100°  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim  
 LUMENS/WATT . . . . . 535.60  
 LUMINOUS FLUX . . . . . 2678 lumens

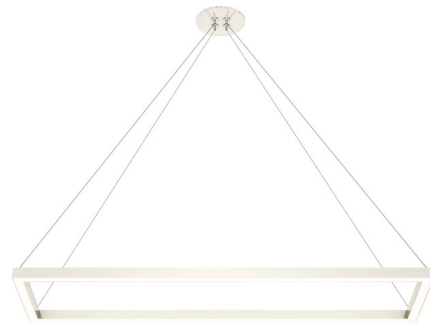

Shown in satin nickel

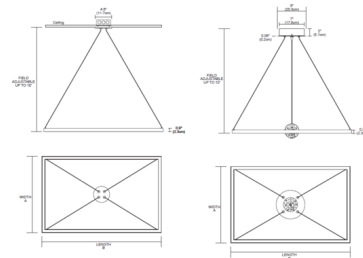

MIYO (27D & 30D)							
Length (inches)	Width (inches)	Height (inches)	Weight (lbs)	Material	Power (Watt)	Beam Angle	Temperature (K)
37	10	0.9	1.5	Aluminum	40	100°	2700K
49	10	0.9	2.0	Aluminum	40	100°	2700K
37	10	0.9	1.5	Aluminum	40	100°	3000K
49	10	0.9	2.0	Aluminum	40	100°	3000K



CLICK TO VIEW PRODUCT

Notes: