




BRAND

PureEdge Lighting

DESCRIPTION

The Cirrus MIYO (Make-It-Your-Own) Rectangle High Efficiency LED Suspension with Lit Corners is a combination of clean, linear channels resulting in a geometric design. Features 5 watts per foot in Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature with a high efficiency lens with 100 degree beam spread. Available in a 10 inch width x 37 or 49 inch length. Supplied with 10 foot field adjustable suspension cables. Includes a 120V input, 24VDC Class 2 output ELV power supply which fits inside 4 or 8 inch canopy (depending upon length). Dimmable with a low voltate electronic (ELV) dimmer, sold separately.

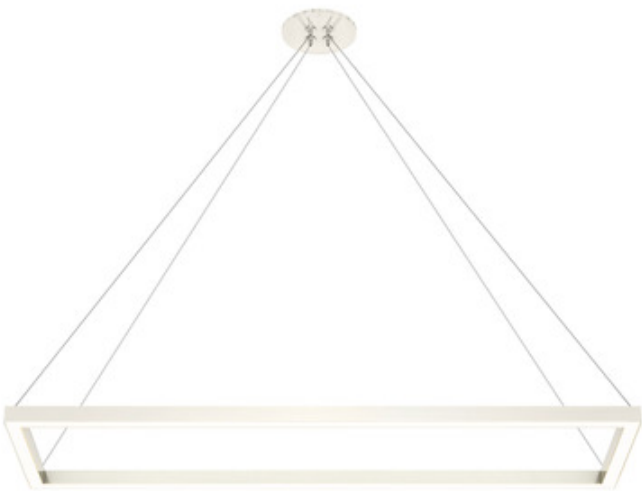


Shown in: Satin Nickel

SHADE COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	40W
DIMMER	Low Voltage Electronic
DIMENSIONS	37"L x 10"W x 0.9"H
INTEGRATED LED MODULE	
LAMP	8 x LED/5W/120V LED

Technical Information

LUMINOUS FLUX	2976 lumens
LUMENS/WATT	595.20
LAMP COLOR	3000K Warm Dim
COLOR RENDERING	95 CRI
BEAM ANGLE	100°

SPEC #	EDG898190
--------	-----------

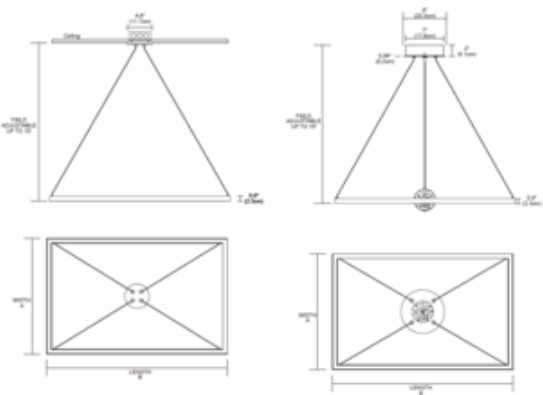

MIYO DIM (27D & 30D)						
Fixture Length (inches)	Fixture Width (inches)	Fix H (inches)	Fix B (inches)	Total lumens (27D)	lumens (30D)	Total lumens (30D)
10	10	10	10	20	0" Beam	1000
15	15	15	15	30	0" Beam	1500
20	20	20	20	40	0" Beam	2000
25	25	25	25	50	0" Beam	2500
30	30	30	30	60	0" Beam	3000
35	35	35	35	70	0" Beam	3500
40	40	40	40	80	0" Beam	4000
45	45	45	45	90	0" Beam	4500
50	50	50	50	100	0" Beam	5000
55	55	55	55	110	0" Beam	5500
60	60	60	60	120	0" Beam	6000
65	65	65	65	130	0" Beam	6500
70	70	70	70	140	0" Beam	7000
75	75	75	75	150	0" Beam	7500
80	80	80	80	160	0" Beam	8000
85	85	85	85	170	0" Beam	8500
90	90	90	90	180	0" Beam	9000
95	95	95	95	190	0" Beam	9500
100	100	100	100	200	0" Beam	10000

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE