

# Lightology

lightology.com  
866-954-4489  
04-04-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EMR905645**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Bela Lighted Mirror By Electric Mirror



### Description

The Bela Lighted Mirror features a smooth polished edge and rounded bands of light. Copper-free, corrosion resistant DuraMirror glass with forward facing task lighting. Available with standard or Ava control options. Standard control option allows for control with an on/off switch or forward phase dimming switch. Ava may be controlled by an external on/off light switch or with the Ava touch control located near the bottom of the mirror. Ava Smart Look technology features tunable white LED lights that allow you to select the color temperature. Select between 6500K for a day of outdoor activities, 4600K for your daily routine, or 2700K for a night out on the town. Tap to Cycle through 2700K, 4600K, 6500K, Night Glow and Off. At every level, hold to dim down to 10%. After one hour of non-use, Energy Save Mode automatically dims lights to 10%. Note: The Bela mirror must be installed in the W x H (width x height) orientation as listed; it cannot be installed in any other direction.

### Specifications


COLOR	N/A
BODY FINISH	Mirror
WATTAGE	62W
DIMMER	Standard 120V
DIMENSIONS	24"W x 42"H x 1.75"D
INTEGRATED LED MODULE	1 x LED/62W/120-277V LED
COUNTRY OF ORIGIN	United States

### Technical Information

LAMP LIFE	52000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	130.77
LUMINOUS FLUX	8108 lumens



Shown in mirror

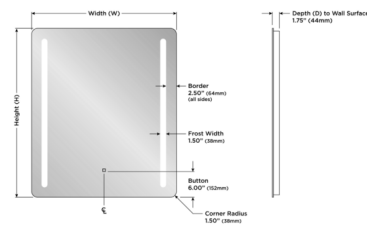

Base Model*	Model Type	Dimensions	Initial Lumens/Picture	Power Requirements
BEL-3642	Standard	24" W x 42" H x 1.75" D (610mm W x 1067mm H x 44mm D)	8108	120-277VAC, 62W
BEL-2462-AK	With Ava**	24" W x 42" H x 1.75" D (610mm W x 1067mm H x 44mm D)	3,374	120 or 277VAC, 45W
BEL-3642	Standard	36" W x 42" H x 1.75" D (914mm W x 1067mm H x 44mm D)	8108	120-277VAC, 62W
BEL-3642-AK	With Ava**	36" W x 42" H x 1.75" D (914mm W x 1067mm H x 44mm D)	3,374	120 or 277VAC, 45W



CLICK TO VIEW PRODUCT

Notes: