

Lightology

lightology.com
866-954-4489
12-28-25

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **ELE918369**

Approved On: _____ Approved By: _____

Arkay One Outdoor Bollard

By Visual Comfort Architectural



Description


The Arkay One Bollard features a Wide Type II asymmetric light distribution ideal for outdoor path and campus illumination. Die cast aluminum structure available in Black marine grade powder coat finish with stainless steel hardware for durability in harsh elements and appropriate for commercial use. Bolt mounting option - bollard base not suitable for branch circuit through wiring. Universal 120-277V with integral surge protection driver. Dimmable with 0-10V, electronic low voltage (ELV) or Triac dimmer, sold separately. ETL listed. IP65 rated for wet locations. Title 24 compliant. Available in performance options: standard, GFCI outlet, photocontrol, in-line fuse, or emergency back-up.

Specifications

COLOR	N/A
BODY FINISH	Bronze
WATTAGE	16W
DIMMER	0-10V
DIMENSIONS	6"W x 36.8"H x 6"D
INTEGRATED LED MODULE	1 x LED/16W/120V LED
COUNTRY OF ORIGIN	China

Technical Information

LAMP LIFE	70000 hours
COLOR RENDERING	80 CRI
LAMP COLOR	3000K
LUMENS/WATT	56.31
LUMINOUS FLUX	901 lumens

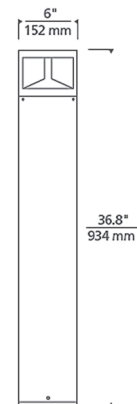

Notes: