

Lightology

lightology.com
866-954-4489
07-09-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE918404**
 Approved On: _____ Approved By: _____

Arkay Two Outdoor Bollard By Visual Comfort Architectural



Description

The Arkay Two Bollard features symmetrical light distribution which aims light downward and creates pools of tightly controlled light, ideal for outdoor path and campus illumination. Die cast aluminum structure available in Black marine grade powder coat finish with stainless steel hardware for durability in harsh elements and appropriate for commercial use. Bolt mounting option - bollard base not suitable for branch circuit through wiring. Universal 120-277V with integral surge protection driver. Dimmable with 0-10V, electronic low voltage (ELV) or Triac dimmer, sold separately. ETL listed. IP65 rated for wet locations. Title 24 compliant. Available in performance options: standard, GFCI outlet, photocontrol, in-line fuse, or emergency back-up.

Specifications


COLOR	N/A
BODY FINISH	Black
WATTAGE	24W
DIMMER	0-10V
DIMENSIONS	6"W x 36.8"H
INTEGRATED LED MODULE	1 x LED/24W/120-277V LED
COUNTRY OF ORIGIN	China

Technical Information

LAMP LIFE	70000 hours
COLOR RENDERING	80 CRI
LAMP COLOR	3000K
LUMENS/WATT	51.33
LUMINOUS FLUX	1232 lumens



Shown in black

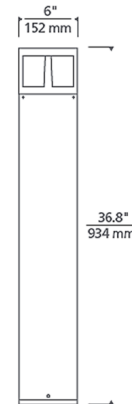

CLICK TO VIEW PRODUCT

Notes: