

# Lightology

lightology.com  
866-954-4489  
04-15-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE929462**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Element 2 inch RD Flanged Adjustable Chicago Plenum Housing By Visual Comfort Architectural



### Description

The 2 Inch Round Flanged Adjustable Downlight Chicago Plenum Housing is constructed of heavy gauge cold rolled steel with a durable Black powder coat finish. This specification grade housing features an integral 12 watt (average 930 lumens) or 17 watt (average 1250 lumens) LED module in three color temperature options with 20, 30, 40 or 60 degree beam angle, or Warm Dim (3000K to 1800K) in low output 12 watt (average 850 lumens) and 20, 30, 40 or 60 degree beam angle. 2.75 inch ceiling cutout, suitable for ceilings up to 2 inch thick. ETL listed. Suitable for damp locations. Title 24 compliant. 5 year warranty. 120-277V Universal driver with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1%, sold separately. A complete fixture requires a housing and trim, sold separately. Note: Warm Dim option available in low output only (12 Watt).

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 10"W x 5.25"H
INTEGRATED LED MODULE	1 x LED/12W/120-277V LED

### Technical Information

APERTURE SIZE	2.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	6"
HOUSING TYPE	Chicago plenum approved
CEILING TYPE	Drywall with Trim
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	78.25
LUMINOUS FLUX	939 lumens



Shown in black

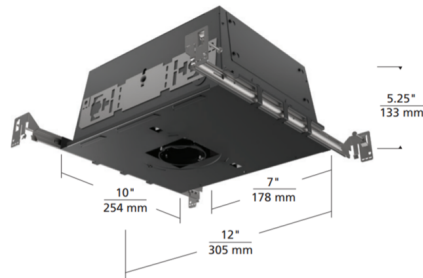

CLICK TO VIEW PRODUCT

Notes: