

Lightology

lightology.com
866-954-4489
07-05-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE931070**
Approved On: _____ Approved By: _____

Multiples 1 X 2 Open Flanged IC Airtight Housing

By Visual Comfort Architectural



Description


Multiples 1 X 2 Open Flanged IC Airtight Housing for Open Light Modules features a patented LED spot dome module with a remarkable tool-free adjustment and locking mechanism. Constant current driver. Dimmable with an electronic low voltage (down to 1 percent) or 0-10V dimmer (down to 5 percent), sold separately. 5 inch ceiling opening. ETL listed for damp location. Title 24 Compliant. 5 year warranty. Requires two Element Lighting Multiples Open Light Modules, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	24W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.9"L x 8.7"W x 5.8"H
INTEGRATED LED MODULE	2 x LED/12W/120V LED

Technical Information

APERTURE SIZE	5.000"
APERTURE SHAPE	Rectangular
HOUSING HEIGHT	6"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
COLOR RENDERING	80 CRI
LUMENS/WATT	209.33
LUMINOUS FLUX	2512 lumens

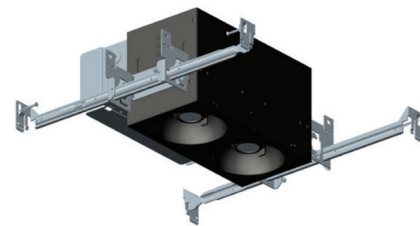

Shown in white

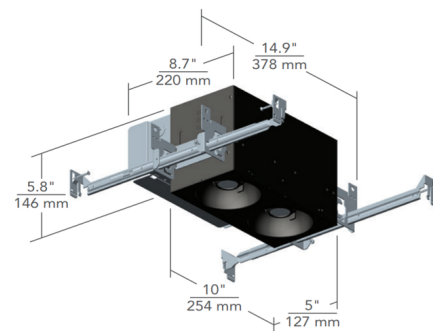

CLICK TO VIEW PRODUCT

Notes: