

Lightology

lightology.com
866-954-4489
07-05-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE931094**
Approved On: _____ Approved By: _____

Multiples 1 X 2 Open Flangeless Non IC Airtight Housing

By Visual Comfort Architectural



Description


Multiples 1 X 2 Open Flangeless Non IC Airtight Housing for Open Light Modules features a patented LED spot dome module with a remarkable tool-free adjustment and locking mechanism. Housing available in low and high output options (see light module for more information). Includes a 12 or 17 watt LED light source. Constant current driver. Dimmable with an electronic low voltage (down to 1 percent) or 0-10V dimmer (down to 5 percent), sold separately. 5 inch ceiling opening. ETL listed for damp location. Title 24 Compliant. 5 year warranty. Requires two Element Lighting Multiples Open Light Modules, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	24W
DIMMER	Low Voltage Electronic
DIMENSIONS	15"L x 9"W x 6"H
INTEGRATED LED MODULE	2 x LED/12W/120V LED

Technical Information

APERTURE SIZE	5.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	5"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
COLOR RENDERING	.80 CRI
LUMENS/WATT	104.67
LUMINOUS FLUX	1256 lumens

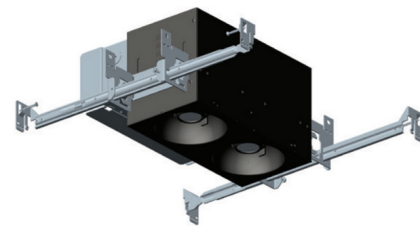

Shown in white

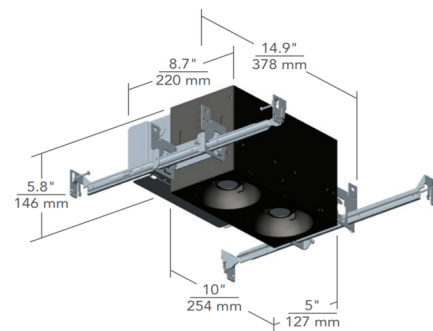

CLICK TO VIEW PRODUCT

Notes: