




BRAND Visual Comfort Architectural


DESCRIPTION

Multiples 1 X 3 Open Flanged Non IC Airtight Housing for Open Light Modules features a patented LED spot dome module with a remarkable tool-free adjustment and locking mechanism. Housing available in low and high output options (see light module for more information). Constant current driver. Dimmable with an electronic low voltage (down to 1 percent) or 0-10V dimmer (down to 5 percent), sold separately. 5 inch ceiling opening. ETL listed for damp location. Title 24 Compliant. 5 year warranty. Requires three Element Lighting Multiples Open Light Modules, sold separately.

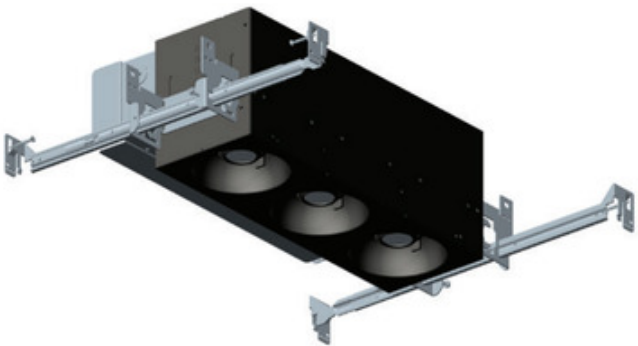

Shown in: White

TRIM COLOR	N/A
BODY FINISH	White
WATTAGE	36W
DIMMER	Low Voltage Electronic
DIMENSIONS	19.9"L x 7.5"W x 5.8"H
INTEGRATED LED MODULE	
LAMP	3 x LED/120-277V LED
Technical Information	
LUMINOUS FLUX	3768 lumens
LUMENS/WATT	314.00
FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction NON IC Airtight
HOUSING HEIGHT	6"
APERTURE SHAPE	Rectangular
SPEC #	ELE931114

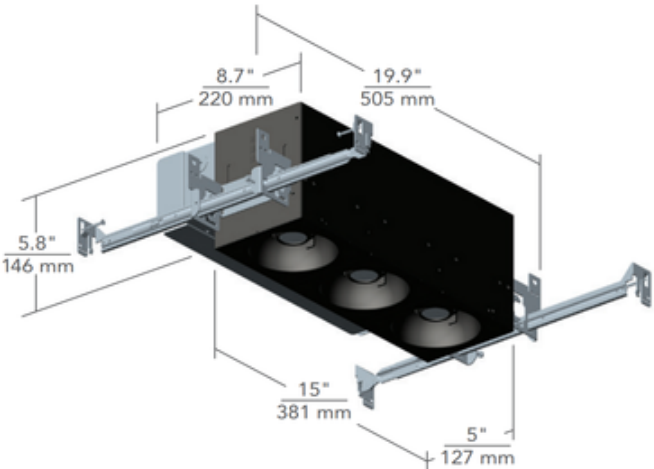

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE