


# Lightology

lightology.com  
866-954-4489  
07-04-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE931134**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Multiples 1 X 3 Open Flangeless Non IC Airtight Housing

By Visual Comfort Architectural



### Description


Multiples 1 X 3 Open Flangeless Non IC Airtight Housing for Open Light Modules features a patented LED spot dome module with a remarkable tool-free adjustment and locking mechanism. Housing available in low and high output options (see light module for more information). Constant current driver. Dimmable with an electronic low voltage (down to 1 percent) or 0-10V dimmer (down to 5 percent), sold separately. 5 inch ceiling opening. ETL listed for damp location. Title 24 Compliant. 5 year warranty. Requires three Element Lighting Multiples Open Light Modules, sold separately.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	36W
DIMMER	Low Voltage Electronic
DIMENSIONS	19.9"L x 8.7"W x 5.8"H
INTEGRATED LED MODULE	3 x LED/12W/120-277V LED

### Technical Information

APERTURE SIZE	5.000"
APERTURE SHAPE	Rectangular
HOUSING HEIGHT	6"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
LUMENS/WATT	314.00
LUMINOUS FLUX	3768 lumens

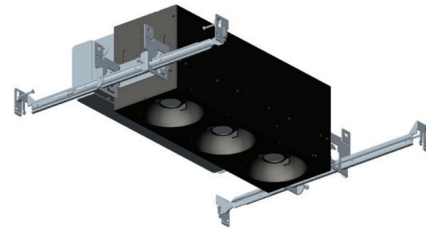

Shown in white

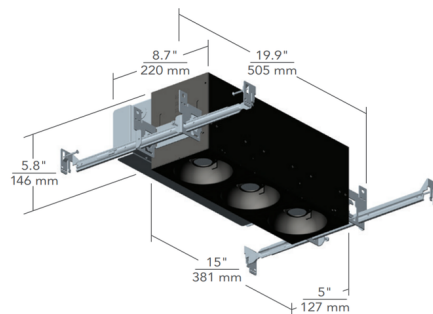

CLICK TO VIEW PRODUCT

Notes: