


# Lightology

lightology.com  
866-954-4489  
05-18-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE931210**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Multiples 2 X 2 Open Flangeless IC Airtight Housing

By Visual Comfort Architectural



### Description


Multiples 2 X 2 Open Flangeless IC Airtight Housing for for Open Light Modules features a patented LED spot dome module with a remarkable tool-free adjustment and locking mechanism. Constant current driver. Dimmable with an electronic low voltage (down to 1 percent) or 0-10V dimmer (down to 5 percent), sold separately. ETL listed for damp location. Title 24 Compliant. 5 year warranty. Requires four Element Lighting Multiples Open Light Modules, sold separately. 5 X 5 inch ceiling opening per module.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	48W
DIMMER	Low Voltage Electronic
DIMENSIONS	24"L x 11"W x 6"H
INTEGRATED LED MODULE	4 x LED/12W/120-277V LED

### Technical Information

APERTURE SIZE	5.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	5"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
LUMENS/WATT	418.67
LUMINOUS FLUX	5024 lumens

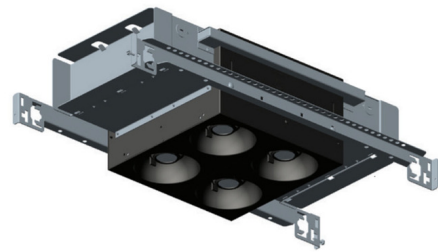

Shown in white

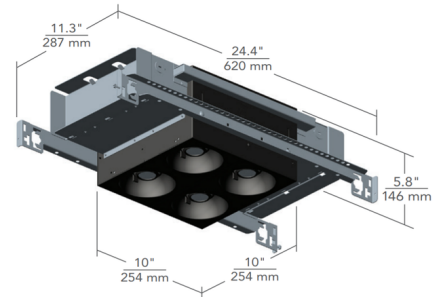

CLICK TO VIEW PRODUCT

Notes: