




### BRAND

Visual Comfort Architectural

### DESCRIPTION

1X2 Flangeless 2-Light Chicago Plenum Non-IC Housing is constructed of heavy gauge cold rolled steel with durable Black or White powder coat finish. Available in a low output (2 x 12 watt) or high output (2 x 17 watt) option. Features a unique patented LED spot dome module enabling tool-free adjustment and locking while maintaining center beam through the aperture. 35 degree tilt, 360 degree rotation. Low profile design for use in standard 2X6 construction. Accommodates up to 2 inch ceiling thickness. Includes integrated junction box approved for branch circuit through wiring. Housing includes individual driver for each module (ie: 2 drivers in a 1x2). Flangeless housing includes extruded and precision welded aluminum plaster plate. 5 inch x 5 inch ceiling cut-out per module. ETL listed. Suitable for damp locations. 5 year warranty. Dimming Options: Electronic low voltage (ELV) down to

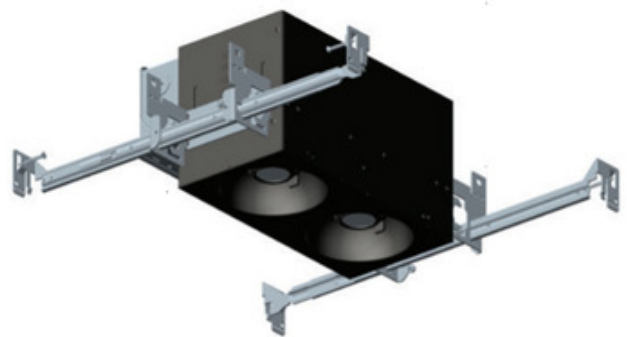


Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	34W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.9"L x 7.5"W x 5.8"H
INTEGRATED LED MODULE	
LAMP	2 x LED/120-277V LED

#### Technical Information

LUMINOUS FLUX	3196 lumens
LUMENS/WATT	188.00
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	Chicago plenum approved
HOUSING HEIGHT	6"

SPEC #	ELE931323
--------	-----------

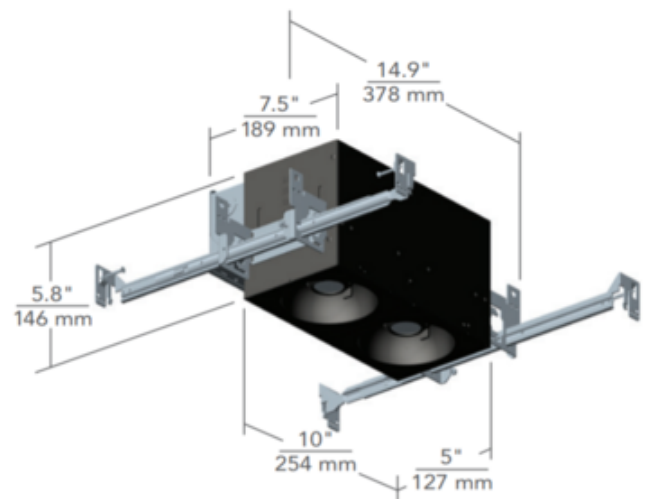

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE