



### BRAND

PureEdge Lighting

### DESCRIPTION

Cirrus Ceiling Channel S1 Lens Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 480 inches, features a square lens with 105 degree beam, three wattage options, and a spectrum of color temperature options. Maximum shipping length for Chrome is 84 inches. Includes a 4.6 inch square canopy. May be ordered with a Slim Profile Channel Junction Box (C-1RE-JBOX), sold separately. Mounting clips (CC-MCL) are included for use every 18 inches. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Required power supply, dimmer control, and optional accessories sold separately. Note: Limited quantities available in Bronze finish.




*Shown in: Satin Aluminum*

SHADE COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Dimmable
DIMENSIONS	12"L x 0.9"W x 0.9"H
INTEGRATED LED MODULE	
LAMP	1 x LED/5W/24V LED

#### Technical Information

LUMINOUS FLUX	355 lumens
LUMENS/WATT	71.00
LAMP COLOR	2700K
COLOR RENDERING	95 CRI
BEAM ANGLE	105°

SPEC #	EDG93370
--------	----------

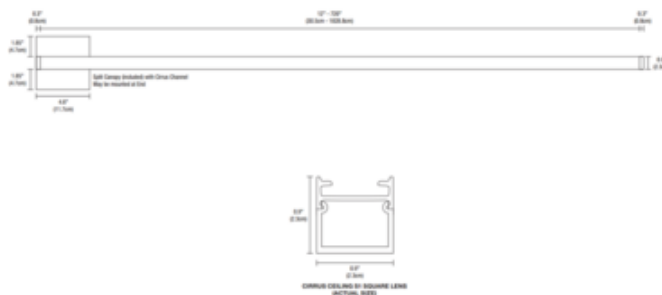

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE