

# Lightology

lightology.com  
866-954-4489  
04-27-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE934749**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 1X3 Trimmed Flangeless Non-IC Airtight Housing By Visual Comfort Architectural



### Description


1X3 Trimmed Flangeless 3-Light Non-IC Airtight Housing is constructed of heavy gauge cold rolled steel with durable Black or White powder coat finish. Available in a low output (3 x 12 watt) or high output (3 x 17 watt) option. Features a unique patented LED spot dome module enabling tool-free adjustment and locking while maintaining center beam through the aperture. 35 degree tilt, 360 degree rotation. Low profile design for use in standard 2X6 construction. Accommodates up to 2 inch ceiling thickness. Includes integrated junction box approved for branch circuit through wiring. Housing includes individual driver for each module (ie: 3 drivers in a 1x3). Flangeless housing includes extruded and precision welded aluminum plaster plate. 5 inch x 5 inch ceiling cut-out per module. ETL listed. Suitable for damp locations. 5 year warranty. Dimming Options: Electronic low voltage (ELV) down to

### Specifications


|                        |                          |
|------------------------|--------------------------|
| REFLECTOR/BAFFLE COLOR | N/A                      |
| BODY FINISH            | Black                    |
| WATTAGE                | 36W                      |
| DIMMER                 | Low Voltage Electronic   |
| DIMENSIONS             | 19.9"L x 8.7"W x 5.8"H   |
| INTEGRATED LED MODULE  | 3 x LED/12W/120-277V LED |

### Technical Information

|                |                                  |
|----------------|----------------------------------|
| APERTURE SIZE  | 2.800"                           |
| HOUSING HEIGHT | 6"                               |
| HOUSING TYPE   | New construction NON IC Airtight |
| CEILING TYPE   | Drywall Trimless/Flush           |
| LUMENS/WATT    | 312.00                           |
| LUMINOUS FLUX  | 3744 lumens                      |

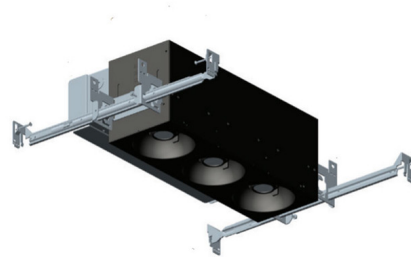

Shown in black

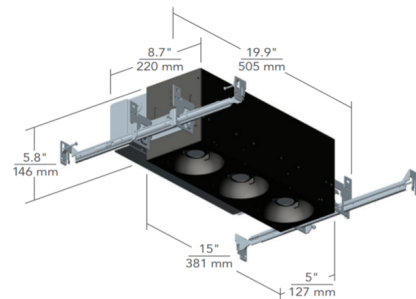

CLICK TO VIEW PRODUCT

Notes: