

# Lightology

lightology.com  
866-954-4489  
04-28-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE934821**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 2X2 Trimmed Flangeless Chicago Plenum Non-IC Housing

By Visual Comfort Architectural



### Description


2X2 Trimmed Flangeless 4-Light Chicago Plenum Non-IC Housing is constructed of heavy gauge cold rolled steel with durable Black or White powder coat finish. Available in a low output (4 x 12 watt) or high output (4 x 17 watt) option. Features a unique patented LED spot dome module enabling tool-free adjustment and locking while maintaining center beam through the aperture. 35 degree tilt, 360 degree rotation. Low profile design for use in standard 2X6 construction. Accommodates up to 2 inch ceiling thickness. Includes integrated junction box approved for branch circuit through wiring. Housing includes individual driver for each module (ie: 4 drivers in a 2x2). Flangeless housing includes extruded and precision welded aluminum plaster plate. 5 inch x 5 inch ceiling cut-out per module. ETL listed. Suitable for damp locations. 5 year warranty. Dimming Options: Electronic low voltage (ELV) down to

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	48W
DIMMER	Low Voltage Electronic
DIMENSIONS	24.4"L x 11.3"W x 5.8"H
INTEGRATED LED MODULE	4 x LED/12W/120-277V LED

### Technical Information

APERTURE SIZE	2.800"
HOUSING HEIGHT	6"
HOUSING TYPE	Chicago plenum approved
CEILING TYPE	Drywall Trimless/Flush
LUMENS/WATT	416.00
LUMINOUS FLUX	4992 lumens

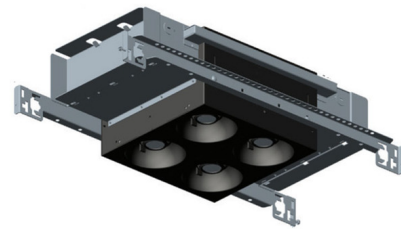

Shown in black

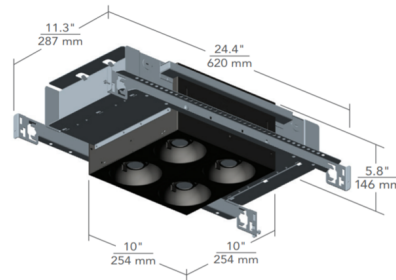

CLICK TO VIEW PRODUCT

Notes: