

Lightology

lightology.com
866-954-4489
04-24-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE934829**
 Approved On: _____ Approved By: _____

2X2 Trimmed Flangeless Non-IC Airtight Housing

By Visual Comfort Architectural



Description


2X2 Trimmed Flangeless 4-Light Non-IC Airtight Housing is constructed of heavy gauge cold rolled steel with durable Black or White powder coat finish. Available in a low output (4 x 12 watt) or high output (4 x 17 watt) option. Features a unique patented LED spot dome module enabling tool-free adjustment and locking while maintaining center beam through the aperture. 35 degree tilt, 360 degree rotation. Low profile design for use in standard 2X6 construction. Accommodates up to 2 inch ceiling thickness. Includes integrated junction box approved for branch circuit through wiring. Housing includes individual driver for each module (ie: 4 driver in a 2x2). Flangeless housing includes extruded and precision welded aluminum plaster plate. 5 inch x 5 inch ceiling cut-out per module. ETL listed. Suitable for damp locations. 5 year warranty. Dimming Options: Electronic low voltage (ELV) down to

Specifications


| | |
|------------------------|--------------------------|
| REFLECTOR/BAFFLE COLOR | N/A |
| BODY FINISH | Black |
| WATTAGE | 48W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 24.4"L x 11.3"W x 5.8"H |
| INTEGRATED LED MODULE | 4 x LED/12W/120-277V LED |

Technical Information

| | |
|----------------|----------------------------------|
| APERTURE SIZE | 2.800" |
| HOUSING HEIGHT | 6" |
| HOUSING TYPE | New construction NON IC Airtight |
| CEILING TYPE | Drywall Trimless/Flush |
| LUMENS/WATT | 416.00 |
| LUMINOUS FLUX | 4992 lumens |

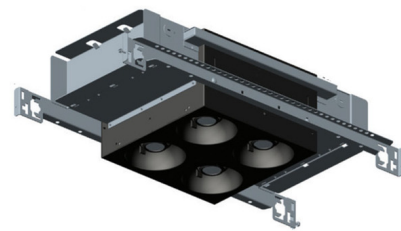

Shown in black

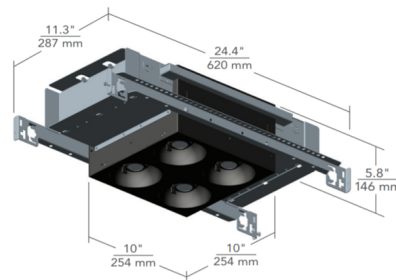

CLICK TO VIEW PRODUCT

Notes: