Lightology

lightology.com
866-954-4489
11-07-26

Project:

Company:

Location: Fixture Type:

SPEC #: **ELE940915**

Approved On: Approved By:

Element 3IN RD Flanged Adj Shallow New Construction Housing


By Visual Comfort Architectural

Description

3 Inch Round 90CRI Flanged Adjustable Downlight IC Airtight or Chicago Plenum New Construction Housing for round flanged trims. Lockable, hot aiming with 0-40 degree tilt and 361 degree rotation.This small aperture LED downlight is fully adjustable and the design allows the LED to be positioned closer to the aperture for maximum light output and efficiency, or higher to minimize glare on the trim. Includes a 12 or 17 watt LED module with 10, 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.Note: Warm Dim option is not available with 10 degree beam angle.



Shown in black powder coat

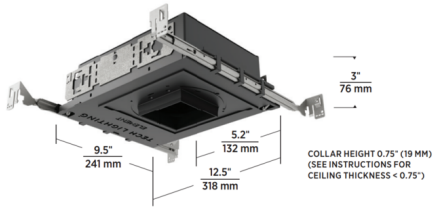

IC AIRTIGHT / CHICAGO PLENUM

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black Powder Coat
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"L x 9.5"W x 3"H
INTEGRATED LED MODULE	1 x LED/12W/120-277V LED

Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	3"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	60°
COLOR RENDERING	90 CRI
LAMP COLOR	3500K
LUMENS/WATT	98.08
LUMINOUS FLUX	1177 lumens

CLICK TO VIEW PRODUCT

Notes: