

Lightology

lightology.com
866-954-4489
11-07-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE941417**
Approved On: _____ Approved By: _____

Element 3IN RD Flanged Dual Adj New Construction Housing By Visual Comfort Architectural



Description


3 Inch Round 90CRI Flanged Dual Adjustable Non IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for round flanged trims features two closely spaced independently adjustable downlights. Offered with lockable, hot aiming with 0-40 degree tilt and 361 degree rotation ability. Includes two 12 or 17 watt LED modules in 2700K, 3000K or 3500K color temperature options or Warm Dim LED (3000K-1800K). Offered with a 10, 18, 25, 40 or 60 degree beam angle. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and two trims, sold separately. Note: Warm Dim option is not available with 10 degree beam angle.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH Black Powder Coat
WATTAGE 24W
DIMMER Low Voltage Electronic
DIMENSIONS 25.9"L x 11.5"W x 4.1"H
INTEGRATED LED MODULE 2 x LED/12W/120-277V LED

Technical Information

APERTURE SHAPE Round
HOUSING HEIGHT 4"
HOUSING TYPE Chicago plenum approved
CEILING TYPE Drywall with Trim
FUNCTION Adjustable Accent
LAMP LIFE 50000 hours
BEAM ANGLE 60°
COLOR RENDERING 90 CRI
LAMP COLOR 3000K Warm Dim
LUMENS/WATT 150.00
LUMINOUS FLUX 1800 lumens

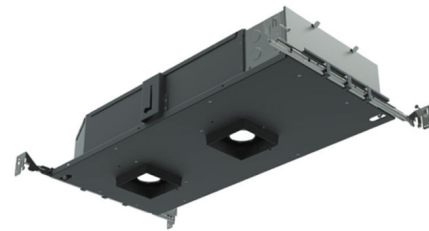

Shown in black powder coat

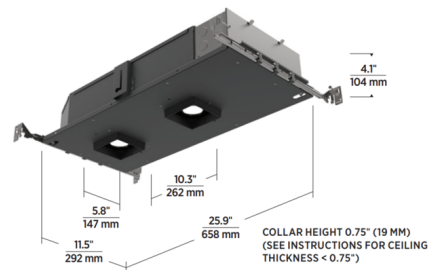

IC AIRTIGHT / NON-IC AIRTIGHT / CHICAGO PLENUM



CLICK TO VIEW PRODUCT

Notes: