Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **ELE943650**

Approved On: Approved By:

Element 3 inch RD Flangeless Adjustable Non-IC Remodel Housing


By Visual Comfort Architectural

Description

3IN RD Flangeless Adjustable Non-IC Remodel Housing for use with flangeless trims. Features precision aiming mechanism with a 0-40 degree tilt, 361 degree rotation, and Element's high-low lamp positioning. Available in 2700K, 3000K or 3500K color temperature options or Warm Dim LED (3000K-1800K). Includes two lumen package options with 10, 18, 20, 40 or 60 degree beam angle. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for use with Warm Dim option.



Shown in black

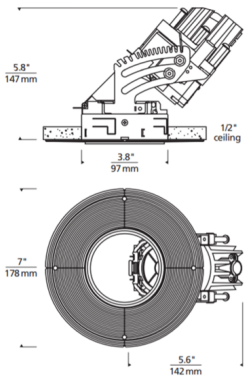

SHOWN IN ROUND FLANGELESS AT FULL TILT (45°)

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	4"L x 4"W x 6"H
INTEGRATED LED MODULE	1 x LED/12W/120-277V LED

Technical Information

APERTURE SIZE	3.800"
APERTURE SHAPE	Round
HOUSING HEIGHT	3"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K Warm Dim
LUMENS/WATT	75.00
LUMINOUS FLUX	900 lumens

CLICK TO VIEW PRODUCT

Notes: