

Lightology

lightology.com
866-954-4489
04-08-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE944626**
 Approved On: _____ Approved By: _____

Element 3IN SQ Flanged Adjustable New Construction Housing By Visual Comfort Architectural



Description

3 Inch Square 90CRI Flanged Adjustable Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing is designed for use with square flanged trims. Tool-free aiming/locking: 0-40 degree tilt, 361 degree rotation. This specification grade housing features an integral 12 or 17 watt LED module in 2700K, 3000K and 3500K color temperature options or Warm Dim (3000K-1800K) with 10, 18, 25, 40 or 60 degree beam angle. 3 7/8 inch ceiling cutout. Suitable for wet locations with shower trim. Includes a 120/277V Universal driver, dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for Warm Dim option.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"L x 9.5"W x 4"H
INTEGRATED LED MODULE	1 x LED/12W/120-277V LED


Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	4"
HOUSING TYPE	Chicago plenum approved
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	10°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	93.67
LUMINOUS FLUX	1124 lumens



IC AIRT

Shown in black

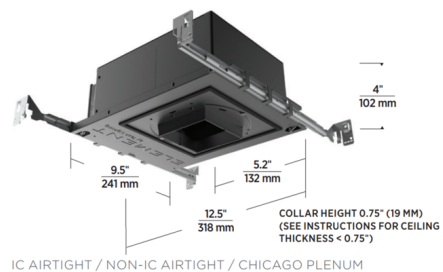

IC AIRTIGHT / NON-IC AIRTIGHT / CHICAGO PLENUM



CLICK TO VIEW PRODUCT

Notes: