

Lightology

lightology.com
866-954-4489
05-17-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE944634**
 Approved On: _____ Approved By: _____

Element 3IN SQ Flanged Adjustable New Construction Housing By Visual Comfort Architectural



Description

3 Inch Square 90CRI Flanged Adjustable Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing is designed for use with square flanged trims. Tool-free aiming/locking: 0-40 degree tilt, 361 degree rotation. This specification grade housing features an integral 12 or 17 watt LED module in 2700K, 3000K and 3500K color temperature options or Warm Dim (3000K-1800K) with 10, 18, 25, 40 or 60 degree beam angle. 3 7/8 inch ceiling cutout. Suitable for wet locations with shower trim. Includes a 120/277V Universal driver, dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for Warm Dim option.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"L x 9.5"W x 4"H
INTEGRATED LED MODULE	1 x LED/12W/120-277V LED


Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	4"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	10°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	93.67
LUMINOUS FLUX	1124 lumens



IC AIRT

Shown in black

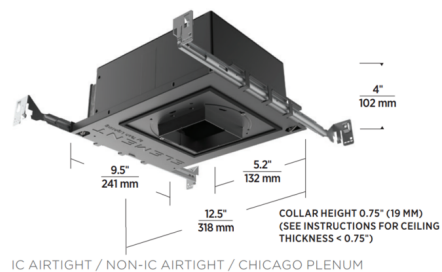

IC AIRTIGHT / NON-IC AIRTIGHT / CHICAGO PLENUM



CLICK TO VIEW PRODUCT

Notes: