



BRAND Visual Comfort Architectural

DESCRIPTION

3 Inch Square 90CRI Flanged Adjustable Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing is designed for use with square flanged trims. Tool-free aiming/locking: 0-40 degree tilt, 361 degree rotation. This specification grade housing features an integral 12 or 17 watt LED module in 2700K, 3000K and 3500K color temperature options or Warm Dim (3000K-1800K) with 10, 18, 25, 40 or 60 degree beam angle. 3 7/8 inch ceiling cutout. Suitable for wet locations with shower trim. Includes a 120/277V Universal driver, dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for Warm Dim option.




IC AIRT

Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"L x 9.5"W x 4"H
INTEGRATED LED MODULE	
LAMP	1 x LED/12W/120-277V LED

Technical Information

LUMINOUS FLUX	1124 lumens
LUMENS/WATT	93.67
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	10°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction NON IC Airtight
SPEC #	ELE944634

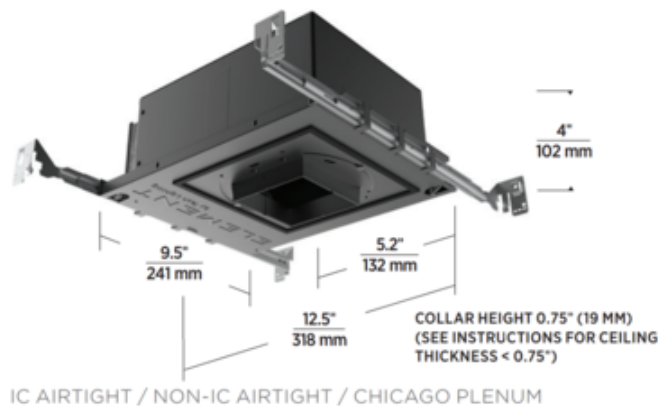

IC AIRTIGHT / NON-IC AIRTIGHT / CHICAGO PLENUM

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE