

Lightology

lightology.com
866-954-4489
12-28-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE947282**
Approved On: _____ Approved By: _____

Element 3IN SQ Flangeless Dual ADJ New Construction Housing

By Visual Comfort Architectural



Description


3 Inch Square 90CRI Flangeless Dual Adjustable Downlight Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for square flangeless trims is a small aperture LED downlight with architectural appearance. Includes 12 or 17 watt LED module in 2700K, 3000K or 3500K color temperature options or Warm Dim LED (3000K-1800K). Offered with a 10, 18, 25, 40 or 60 degree beam angle. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and flangeless trim, sold separately. Note: Warm Dim option is not available with 10 degree beam angle.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH Black Powder Coat
WATTAGE 24W
DIMMER Low Voltage Electronic
DIMENSIONS 25.9"L x 11.5"W x 4.1"H
INTEGRATED LED MODULE 2 x LED/12W/120-277V LED

Technical Information

APERTURE SHAPE Square
HOUSING HEIGHT 4"
HOUSING TYPE Chicago plenum approved
CEILING TYPE Drywall Trimless/Flush
FUNCTION Adjustable Accent
LAMP LIFE 50000 hours
BEAM ANGLE 60°
COLOR RENDERING 90 CRI
LAMP COLOR 3000K Warm Dim
LUMENS/WATT 150.00
LUMINOUS FLUX 1800 lumens

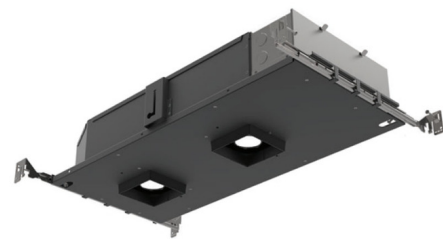

Shown in black powder coat

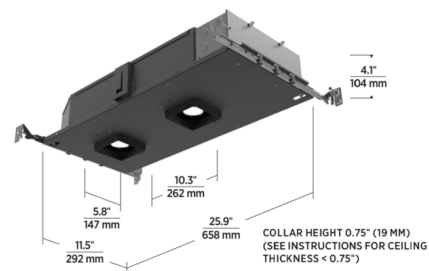

IC AIRTIGHT / NON-IC AIRTIGHT / CHICAGO PLENUM



CLICK TO VIEW PRODUCT

Notes: