

# Lightology

lightology.com  
866-954-4489  
12-28-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG96284**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus D1 Linear Suspension w/Remote/End Feed/SQ Canopy

By PureEdge Lighting



### Description

The Cirrus Remote Power D1 Lens Linear Downlight Suspension with End Feed and Square Canopy is a linear LED fixture that offers direct light in a clean, contemporary style. Available in various increments from 36 to 420 inches with a diffused white 100 degree beam spread lens or 60 degree clear frosted lens, optional black or white louver, a variety of finishes, four wattage options, and a spectrum of color temperature options. Chrome finish available up to 84 inch length. Includes one 4 inch square canopy and 12 foot adjustable coaxial cables. Additional aircraft cables are included for support when fixture exceeds 72 inches. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Title 24 compliant when used with 2700K color temperature and a Universal power supply. Product is built to order.

### Specifications


COLOR . . . . . White Lens  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 6W  
DIMMER . . . . . Dimmable  
DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H  
INTEGRATED LED MODULE . . . . . 3 x LED/2W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 100°  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 106.50  
LUMINOUS FLUX . . . . . 213 lumens



Shown in satin nickel / white lens

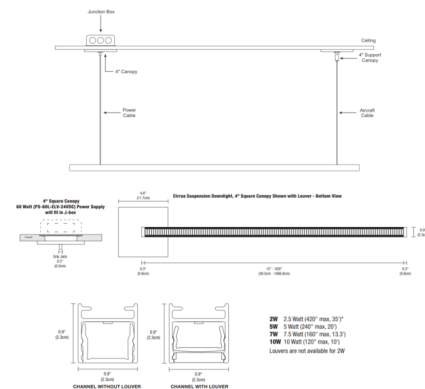

CLICK TO VIEW PRODUCT

Notes: