

Lightology

lightology.com
866-954-4489
06-04-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG96284**
 Approved On: _____ Approved By: _____

Cirrus D1 Linear Suspension w/Remote/End Feed/SQ Canopy

By PureEdge Lighting



Description

The Cirrus Remote Power D1 Lens Linear Downlight Suspension with End Feed and Square Canopy is a linear LED fixture that offers direct light in a clean, contemporary style. Available in various increments from 36 to 420 inches with a diffused white 100 degree beam spread lens or 60 degree clear frosted lens, optional black or white louver, a variety of finishes, four wattage options, and a spectrum of color temperature options. Chrome finish available up to 84 inch length. Includes one 4 inch square canopy and 12 foot adjustable coaxial cables. Additional aircraft cables are included for support when fixture exceeds 72 inches. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Title 24 compliant when used with 2700K color temperature and a Universal power supply. Product is built to order.

Specifications


COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	6W
DIMMER	Dimmable
DIMENSIONS	36"L x 0.9"W x 0.9"H
INTEGRATED LED MODULE	3 x LED/2W/24V LED

Technical Information

LAMP LIFE	50000 hours
BEAM ANGLE	100°
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	106.50
LUMINOUS FLUX	213 lumens



Shown in satin nickel / white lens

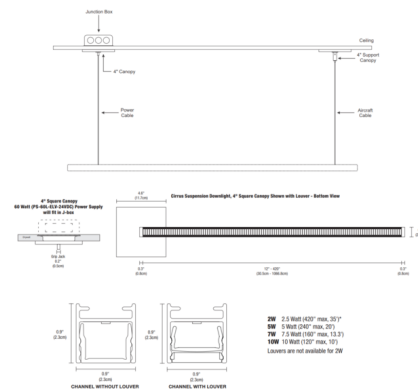

CLICK TO VIEW PRODUCT

Notes: