



BRAND

PureEdge Lighting

DESCRIPTION

Lazer Line is a 24VDC Direct/Indirect (uplight and downlight) LED Lighting System providing general illumination for architectural applications. The field-cuttable dual strip channel is sold in 1 inch increments with 10 watts per foot (4.4 watts up/4.4 watts down) with uplight in RGB (Red/Blue/Green) color temperature and downlight in 2400K, 2700K, 3000K or 3500K. The 4 inch round turnbuckles allow Lazer Line to be positioned 0-90 degrees relative to the mounting surface, creating a 3-dimensional appearance. Mounts to standard 4 inch square junction box with round plaster ring. Paint canopy to blend into wall for a seamless look. Note: A DMX Dynamic color changing power supply is required and sold separately. DMX power supply must be used with PureEdge CDMX1-RGBW or CTP controller. System includes Lazer Line Channel (LZUD), Lazer Line Tape, and turnbuckles. Product is built to order




SHADE COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	50W
DIMMER	N/A
DIMENSIONS	60"L x 0.44"W
INTEGRATED LED MODULE	
LAMP	5 x LED/10W/24V LED

Technical Information

LAMP COLOR	RGB
LAMP LIFE	50000 hours

SPEC # EDG973286

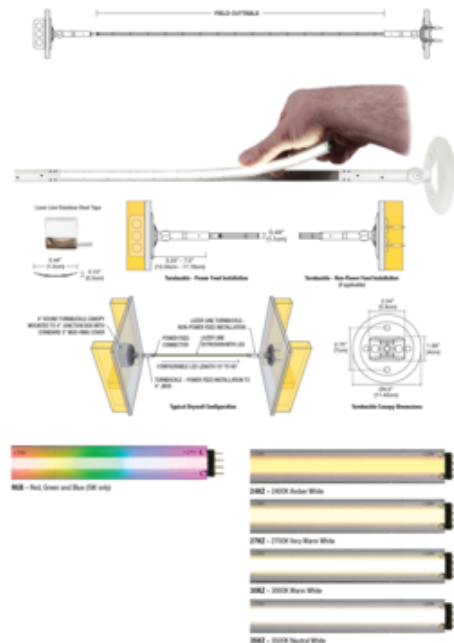

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE