

# Lightology

lightology.com  
866-954-4489  
02-10-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **TCP989315**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_


## 2X2 LED Backlit Panel

By TCP




### Description

The 2X2 LED Panel features a low-profile design, back-lit technology, a 120 beam angle, and a frosted white diffuser for reduced glare and aesthetic appeal. Great alternative to traditional fluorescent troffers. Available in four color temperature options and three wattages. Includes an LED driver with integrated junction box. Designed for easy drop into T-bar grid ceilings. Optional accessories sold separately. DLC 5.0 Standard. IC rated. UL listed for damp locations.

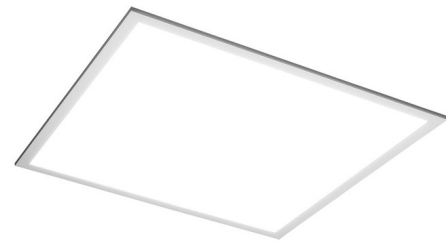

Shown in white / frosted



### Specifications

COLOR . . . . . Frosted  
BODY FINISH . . . . . White  
WATTAGE . . . . . 23W  
DIMMER . . . . . 0-10V  
DIMENSIONS . . . . . 24"W x 1.25"H x 24"D  
INTEGRATED LED MODULE . . . . . 1 x LED/23W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 113.04  
LUMINOUS FLUX . . . . . 2600 lumens



CLICK TO VIEW PRODUCT

Notes: