




BRAND

Lightolier by Signify

DESCRIPTION

Lytecaster 1100DAICM 6.75 Inch Incandescent Insulated Ceiling AirSeal Frame-In Kit is made of galvanized steel. UL listed for direct contact with thermal insulation (IC designation). AirSeal housing minimizes air leakage to less than 2CFM at 1.57 PSF and reduces heat loss and condensation in ceiling. Accommodates all ceilings up to 1 inch thick. 3/8 inch deep integral lip. Four slots are positioned 90 degrees apart to simplify alignment. Push-in/twist-out rotoclips hold reflector flush to ceiling. UL listed for maximum of six No. 12 gauge 90 degree C through branch circuit conductors. Quick release cover for outside access to wiring. Mounting bars extend to accommodate 16 to 24 inch on center joist spacing and feature integral nail for secure attachment to wood construction. UL listed. Suitable for damp locations. Dimensions: 15.5 inch width x 9.25 inch height. Incandescent lamp and wattage dependent on trim kit. A complete fixture includes a frame-in kit and trim kit, sold separately.

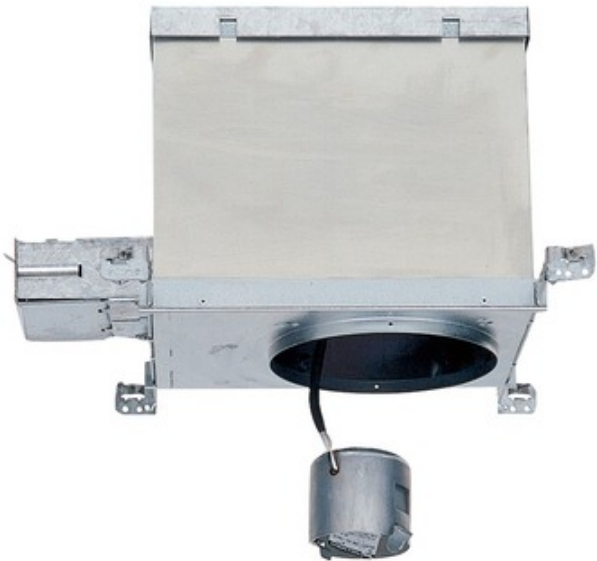

TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	72W
DIMMER	Standard 120V
DIMENSIONS	15.5"W x 9.25"H
BULB NOT INCLUDED	
LAMP	1 x A19/Medium (E26)/72W/120V Incandescent 1 x PAR38/Medium (E26)/120V Halogen 1 x BR40/Medium (E26)/120V Incandescent 1 x BR30/Medium (E26)/120V Incandescent 1 x A19/Medium (E26)/120V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	9"

SPEC #	LTL19055
--------	----------

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE