# TWIGGY S1, SQUARE 1" LENS 120V/12VAC FIXTURE, 92+CRI

MADE IN THE USA REV03.25.15 Ð Transformer Fits Inside Junction Box Intertek 0.9" 4.6' 0.385" 0.9" (2.3cm) (3.56cm) 0.9" (2.3cm) 0 15" 12" to 72' (0.38cm) Channel Transformer Fits Inside Junction Box 0.9" (2.3cm) ∐[ 0.15" 12" to 72 (0.38cm)

#### **Description:**

Adjustable Arm

Transformer Fits Inside of Junction Box

[

Twiggy S1 features a square 1" lambertian white diffuser lens that provides uniform light without hotspots. At 7 watts per foot, the 12 Volt AC fixture contains very warm white, 92+CRI LEDs for excellent color rendering. The Twiggy S1 is available in 12 inch increments up to 72 inches. May be ordered in 3, 6 or 9 inch increments (see page 3 of spec sheet for exact dimensions/ overall length with end caps). Fixture uses a 12 VAC Class 2 electronic low voltage LED transformer (included). Transformer fits inside a standard square 4" electrical box with round plaster ring and floating split canopy (4SQ) or the Slim Profile Junction Box (1RE) that does not require a canopy. Twiggy is dimmable with an electronic low voltage dimmer. Fixtures include a 5 year warranty.

## Finish:

Satin Aluminum, Satin Nickel, Chrome, Antique Bronze, White and Satin Black

## **Applications:**

Indoor Only - Bathroom vanity, architectural lighting, task lighting, general lighting, cove, retail and closets

## Lamp:

Very warm white (2700K) LEDs, 92+CRI LED lamps consume 7 watts per foot 47 lumens per watt; 361 lumens per foot; 67 R9 Value

Very Warm White		
Distance	Foot Candles	
12in	218	
24in	82	
36in	49	
48in	29	

#### **Average Lamp Life:**


50,000 hours

## **Transformer:**

120V input, 12VAC Class 2 output; electronic low voltage LED transformer (included) fits inside standard junction box

## **Dimming:**

Dimmable with electronic low voltage dimmer Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

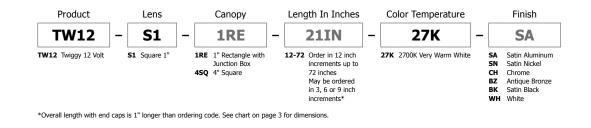

PROJECT:

1718 W. Fullerton Ave. Chicago, IL 60614

www.edgelighting.com

A Division of PureEdge Lighting


## TWIGGY S1, SQUARE 1" LENS 120V/12VAC FIXTURE, 92+CRI

REV.04.22.15

Application: Electronic low voltage dimming for Twiggy Square

**Power Supply:** 120V input, 12VAC class 2 output; electronic low voltage LED transformer (included) that fits inside standard junction box

**Dimming:** Dimmable with electronic low voltage dimmer. Lutron: Diva #DVELV-300P; Skylark #SELV-300P dimmers recommended

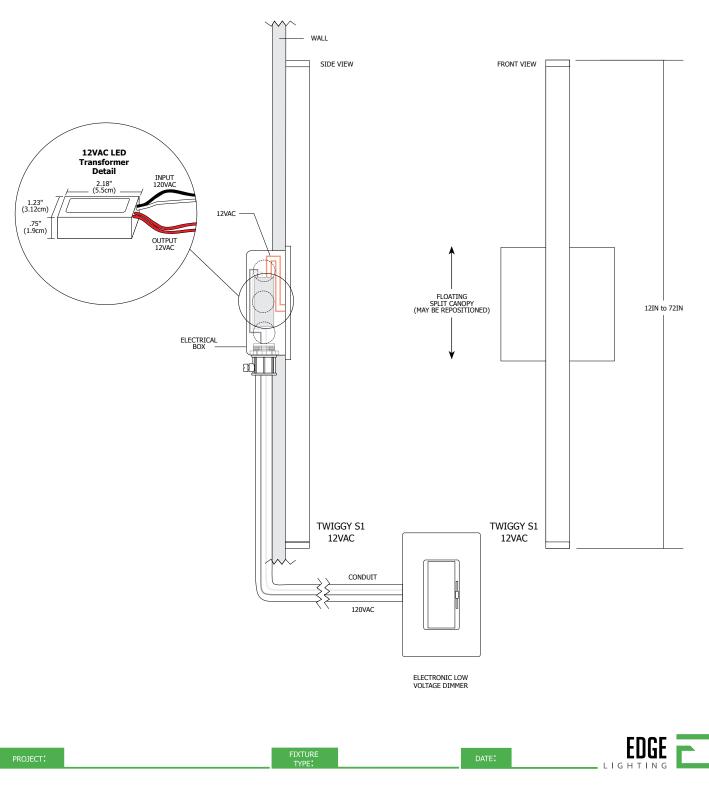

## Please refer to chart below for overall length (with end caps) of Twiggy S1

ORDERING CODE	OVERALL LENGTH (INCHES)
12IN	13
15IN	16
18IN	19
21IN	22
24IN	25
27IN	28
30IN	31
33IN	34
36IN	37
39IN	40
42IN	43
45IN	46
48IN	49
51IN	52
54IN	55
57IN	58
60IN	61
63IN	64
66IN	67
69IN	70
72IN	73



FIXTURE TYPE: