



NOTE: Multiple light channel can be connected together directly by connecting male end of one to the female end of the other one, or by using the flexible connectors up to a maximum of 25 feet.


7: Carefully, connect light channel male end to light channel female end, or refer to the flexible connector instruction.

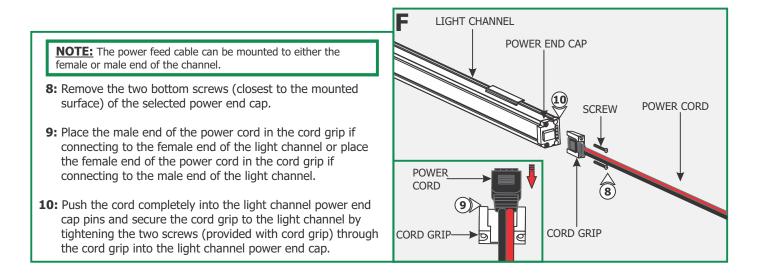

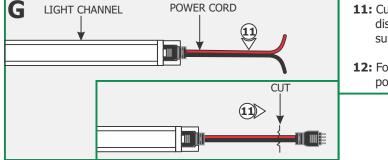


- **11:** Cut the other end of the power cord (male or female) and discard it. Strip the wire end for connecting it to the power supply.
- **12:** Follow the instructions provided with the power supply to power up the light channel.

IMPORTANT INFORMATION REGARDING INSTALLATION AND REWORK OF SOFT STRIP LED

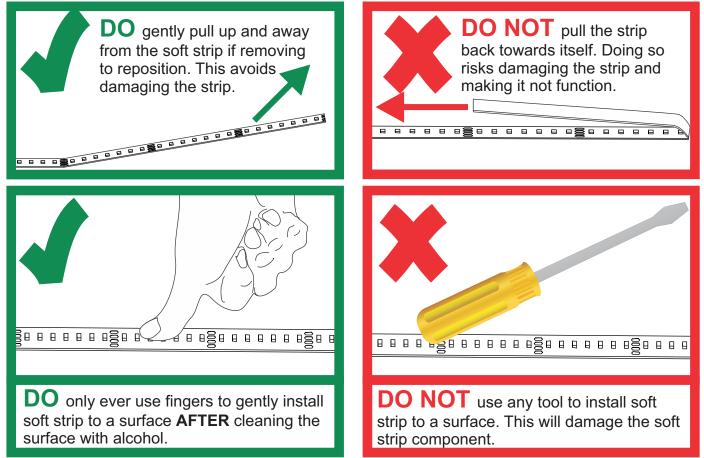

Replacing/Repositioning the Soft Strip

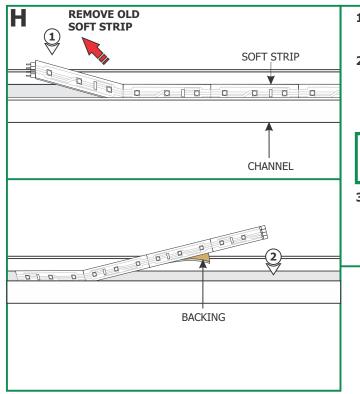

- **1:** Carefully pull existing old Soft Strip completely off the channel.
- **2:** If there is Soft Strip residue on the channel apply in moderation WD-40, or Goo Gone, or a mixture of warm water and lemon oil to the corner of a clean, dry towel. Gently buff the area containing the adhesive residue with small circular motion until it is completely removed.

NOTE: Avoid bending the soft strip in sharp vertical angles which may damage the LEDs. Soft Strips do not bend horizontal. Use proper directional connectors for horizontal turns.

3: Carefully remove the backing from the new LED soft strip, make sure not to remove the tape from the soft strip. Firmly press down the adhesive portion of the soft strip onto the channel while removing the rest of the backing, making sure there are no air bubbles that can cause surface irregularities.

Wiring Diagram

