

100W/24VDC RGB Power Supply with DMX Driver









/iew Side View

Description: Accepts input voltage in a range of 120 - 277VAC and outputs 24VDC power up to 100 watts. The integrated RGB Driver receives signals from CDP, CTP, CDMX1-RGBW, or CDMX1-2XK to control RGB color mixing and light intensity. Power Supply features short circuit and overload protection. Indoor applications only.

Applications: Indoor*

*To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Power Input: 120-277 volts AC, 50/60Hz

Power Output: Class 2, 24 volts DC 4.16A 100 watt maximum


Dimensions: 12.15" x 6.48" x 2.18"

Compatible Controllers: Touch Screen Controller with Power Supply (CTP), Color Dial Controller with Power Supply (CDP), DMX 1 Zone RGBW Touch Controller (CDMX1-RGBW), or Tunable White Touch Controller

(CDMX1-2XK)

100W RGB POWER SUPPLY ORDERING CODE

Product		Wattage		Voltage		Mode	
PS	SB -	100	W -	24V	DC -	RG	В
PSB	Power Supply with Enclosure Box	100W	100 Watt	24VDC	24 Volt DC	RGB	Red, Green & Blue

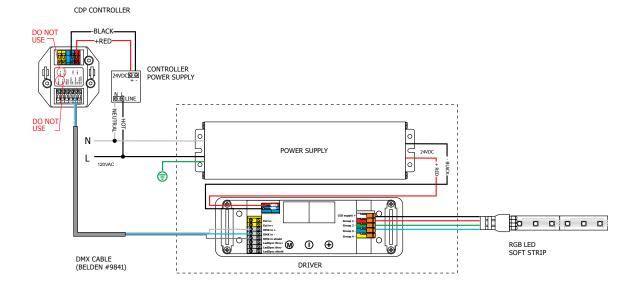

COMPANY	FIXTURE TYPE	DATE	
PROJECT	APPROVED BY		