



TRAC-MASTER®

Avant Garde

FLYBACK SERIES

T227, T228 and T229

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

The Flyback Series is distinguished by a sharp angular form. Flyback fixtures slant back at a 45° angle from the trac enables various illumination spreads.

Construction Die-formed steel housing.

Aiming 90° vertical aiming capability and 358° rotation.

Labels UL listed, CSA certified.

Product specifications subject to change without notice.




Low Voltage MR16

Socket Ceramic bi-pin.

Lamp 12V, 50W maximum MR16 GU5.3/GX5.3 bi-pin • Halogen lamps must be MR16CG type with integral lens (cover glass) except when combined with 2" accessories.

Transformer Must be ordered separately • Compatible with T537 or T538 12V electronic transformer for halogen lamps (D1.2.1) • Compatible with T537U universal 12V electronic transformer for LED or halogen lamps (D1.2.5) • Compatible with T539 12V electronic transformer for halogen lamps (D1.2.0) • Compatible with T542 or T543 12V magnetic transformer for LED or halogen lamps (D1.2.0).

| Catalog Number | Finish | Lamp |
|----------------|--------|--|
| T227WH | White | 50W MR16 max. (halogen must use MR16CG type) |
| T227BL | Black | 50W MR16 max. (halogen must use MR16CG type) |

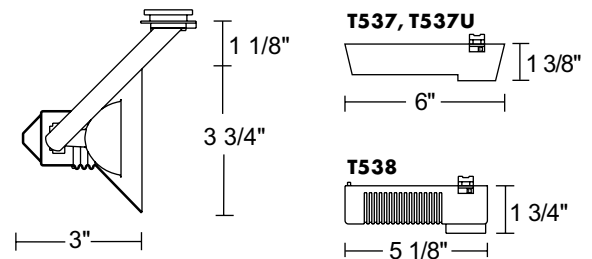

ACCESSORIES

| Cat. No. | Description | Cat. No. | Description | Cat. No. | Description |
|-------------|----------------------|----------|-----------------------|----------|--------------------|
| T7400SA, BL | Accessory Holder | T7477 | Prismatic Spread Lens | T7478 | Linear Spread Lens |
| T741-6 | Color Filters/Lenses | T7420 | Diffusion Lens | T7421 | Uniformity Lens |
| T7401-18 | Dichroic Filters | T7459BL | Hexcell Louver | T7422 | UV Filter |

See specification sheet [D1.2.2](#) for details.


Line Voltage PAR30

Lamp 120V, 75W maximum PAR30 medium base.

Socket Medium base porcelain with nickel plated copper screw shell.

Adapter Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground • On/off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac • "Pull-up" contact to up position for two-circuit application.

| Catalog Number | Finish | Lamp |
|----------------|--------------|----------------|
| T228WH | White | 75W PAR30 max. |
| T228BL | Black | 75W PAR30 max. |
| T228SC | Satin Chrome | 75W PAR30 max. |



TRAC-MASTER®

Avant Garde

FLYBACK SERIES**T227, T228 and T229****Line Voltage PAR38****Lamp** 120V, 150W maximum PAR38 medium base.**Socket** Medium base porcelain with nickel plated copper screw shell.**Adapter** Copper alloy contacts provide precise spring action - no arcing and will not take a set • True, positive electrical ground • On/off switch included
• Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac
• "Pull-up" contact to up position for two-circuit application.

| Catalog Number | Finish | Lamp |
|----------------|--------|-----------------|
| T229WH | White | 150W PAR38 max. |
| T229BL | Black | 150W PAR38 max. |

