

F R E E J A C K

FreeJack Venus Canopy

DESCRIPTION

Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Electronic transformer inside 3" high, 4.5" diameter housing. One FreeJack port; for ceiling or wall.

INSTALLATION


This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). Transformer (included) fits in canopy. For ceiling or wall. If wall mounting, head should be no longer than 6".

OTHER

For use with any 12 or 24 volt halogen FreeJack pendant or head (sold separately).

WEIGHT

0.8lb / 0.36kg ±

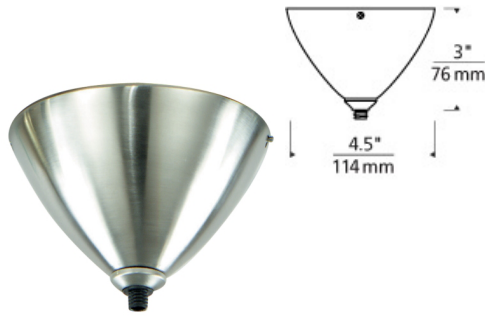

freejack venus canopy

ORDERING INFORMATION

700FJSFV SHAPE OR SIZE	FINISH	VOLTAGE
VENUS INTEGRAL TRANSFORMER	Z ANTIQUE BRONZE	120V IN/12V OUT
	B BLACK	024 120V IN/24V OUT
	C CHROME	277 277V IN/12V OUT
	S SATIN NICKEL	
	W WHITE	



TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700FJSFV _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____
