

# LOW - VOLTAGE PENDANTS

## Cabo Pendant

### DESCRIPTION

Onyx cylinder provides a warm textured look. Includes low-voltage, 50 watt halogen bi-pin lamp or 8 watt replaceable 300 lumen 80 CRI 3000K LED SORAAA® module and six feet of field-cutttable suspension cable. Works with SORAA.

### INSTALLATION


Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. ForFor Kable Lite due to weight.

### ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

### WEIGHT

3lb / 1.36kg ±

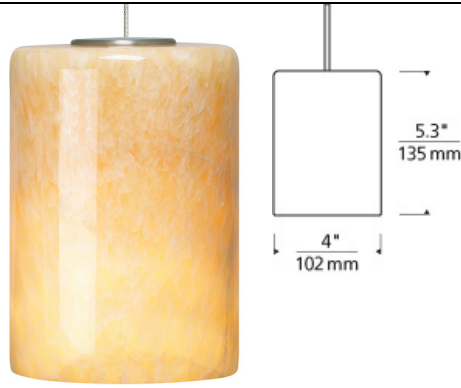

onyx



### ORDERING INFORMATION

700	SYSTEM	CBO	COLOR	FINISH	LAMP
FJ	FREEJACK		ONYX	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT			C CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL			S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy. Note: MP includes 4 Round Flush Canopy.

When installing LED option on MO2 only magnetic transformers may be used.

Chrome not offered on Monorail & Two~Circuit Monorail.



**TECH LIGHTING®**

7400 Linder Avenue T 847.410.4400  
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 \_\_\_\_ CBO \_\_\_\_ \_ \_ \_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2017 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.