



**BRAND**


Juno Lighting

**DESCRIPTION**

T537 12 Volt Electronic Transformer with Quick Jack Adapter is designed to accept low voltage Juno Quick Jack fixtures and pendants for use on 1-circuit and 2-circuit Trac Master track. Available in White, Black or Silver finish. Input: 120VAC, .64A. Output: 11.0-11.8V, 75 watts maximum. Features pull up contact to up position for two circuit application. High impact polycarbonate housing. Integral on-off switch with short circuit protection. ETL listed. Dimensions: 5.9 inch width x 1.75 inch height x 1.25 inch depth. Compatible with Juno Lighting Trac-Lites, Trac-Master 1-circuit and Trac-Master 2-circuit 120 volt line voltage track systems.



<b>SHADE COLOR</b>	N/A
<b>BODY FINISH</b>	White
<b>WATTAGE</b>	75W
<b>DIMMER</b>	Dimmable
<b>DIMENSIONS</b>	5.9"W x 1.75"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	MR16/GU5.3 (bipin)/75W/12V Halogen MR16/GU5.3 (bipin)/12V LED

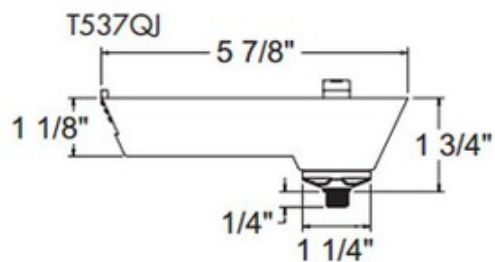

**SPEC #** JUN131794

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE