



BRAND

PureEdge Lighting

DESCRIPTION


Two 2X300 Watt Remote Plug-in Magnetic Transformers convert four line volt inputs into four low voltage 300 watt, 12 volt outputs for powering Monorail 2 Circuit system. The remote transformer must be installed in an accessible location (such as an attic or in a closet), and it is best to keep transformer within 20 feet of power canopy/ junction box to prevent voltage drop. Protected by fast acting secondary circuit breaker. Dimmable using four 600 watt magnetic low voltage dimmers, sold separately. Some buzzing may occur on low levels and may be reduced with four dimming de-buzzing coils, sold separately. System not dimmable when one circuit uses halogen and the other circuit uses LED. All other combinations are dimmable. Requires dual power feed canopy, sold separately. ETL listed. 6 inch width x 9.5 inch length x 4.75 inch height.



SHADE COLOR	N/A
BODY FINISH	Black
WATTAGE	1200W
DIMMER	Low Voltage Magnetic
DIMENSIONS	9.5"L x 6"W x 4.75"H
BULB NOT INCLUDED	
LAMP	1200W Halogen

SPEC #

EDG53559

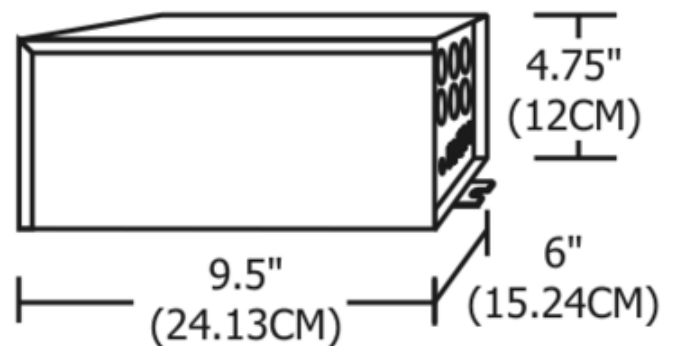

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE