

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#KEE-A3004-BF

WARNING:



Electrical Danger




Turn Power off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4-Medium Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE

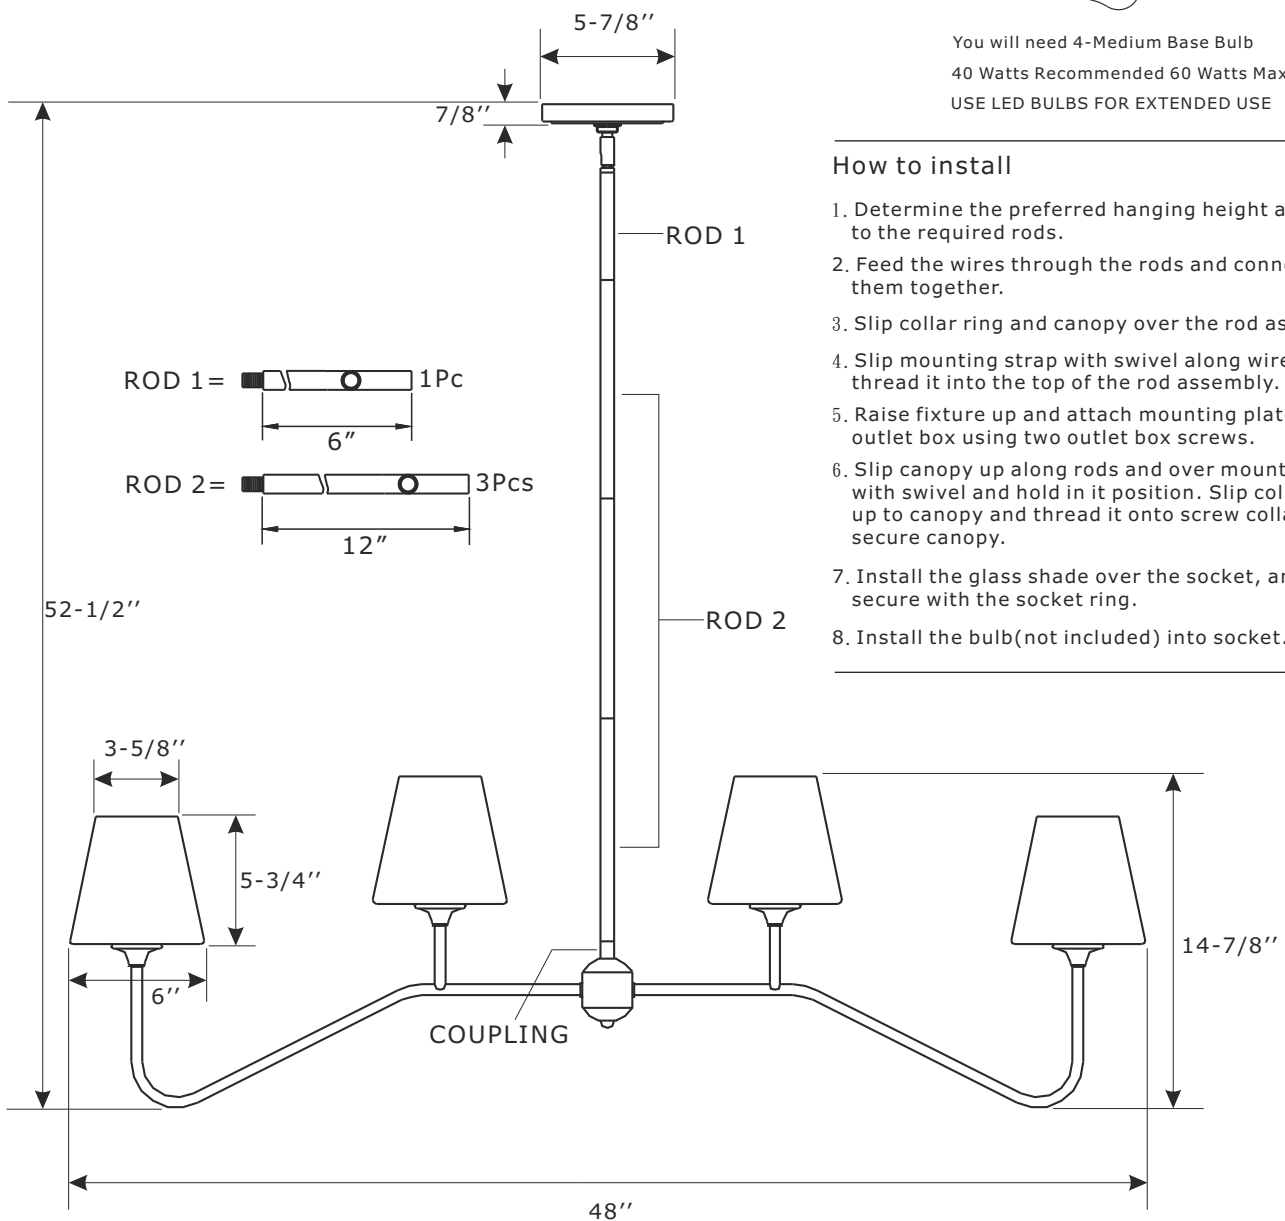

How to install

1. Determine the preferred hanging height and adjust to the required rods.
2. Feed the wires through the rods and connect them together.
3. Slip collar ring and canopy over the rod assembly.
4. Slip mounting strap with swivel along wire and thread it into the top of the rod assembly.
5. Raise fixture up and attach mounting plate to the outlet box using two outlet box screws.
6. Slip canopy up along rods and over mounting plate with swivel and hold in its position. Slip collar ring up to canopy and thread it onto screw collar, to secure canopy.
7. Install the glass shade over the socket, and secure with the socket ring.
8. Install the bulb (not included) into socket.

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#KEE-A3004-BF

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W5-7/8"xH7/8" #XRF3004BFAN5.875IN
- C. (1)-Collar ring
- D. (1)-Rod D5/8"xL6" #XRF3004BFROD6IN
- E. (3)-Rod D5/8"xL12" #XRF3004BFROD12IN
- F. (1)-Coupling
- G. (4)-Socket
- H. (4)-Glass shade #XRF3004SHA6IN
- I. (4)-Socket ring

