
# VISUAL COMFORT & CO.

STUDIO COLLECTION

## KHAN SMALL, MEDIUM & LARGE SCONCES


SLV1011; SLV1012; SLV1013



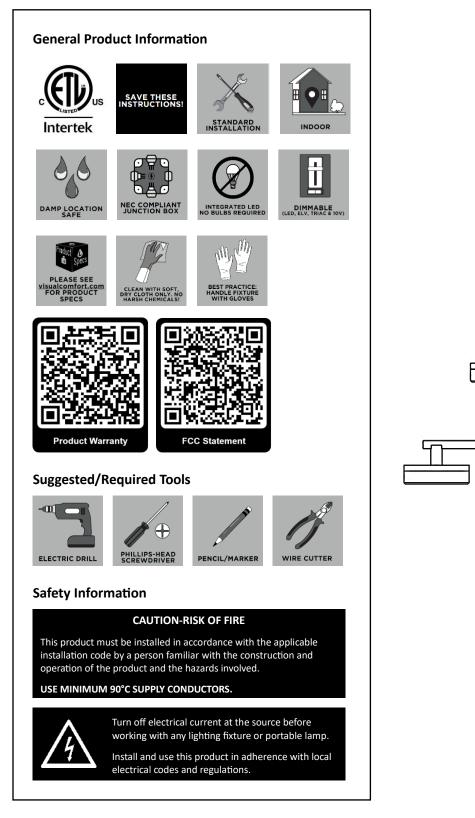

### FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws
- F. Fixture Base
- G. Fixture Screws
- H. Fixture
- I. Shade(s)

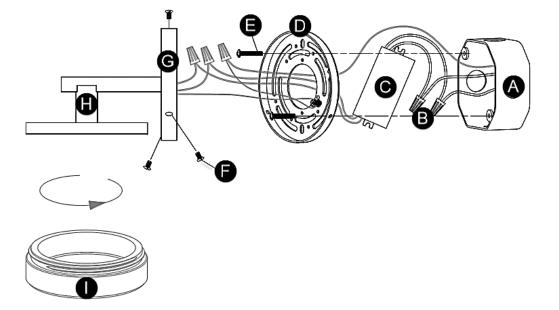

#### **INSTRUCTIONS**

- I. Preparing the Fixture
  - 1. Separate the mounting plate from the fixture backplate.

#### II. Wiring the Fixture

- 1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
- 2. Place the driver in the junction box and connect the input driver wires to the supply wires using the wire nuts.
- 3. Install the mounting plate onto the junction box with the mounting screws, ensuring the output driver wires are accessible.
- 4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
- 5. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Negative (-) fixture wire to negative (-) output driver wire
  - b) Positive (+) fixture wire to positive (+) output driver wire
- 6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
- 7. Carefully tuck the driver and all the wires into the junction box.

#### III. Installing the Fixture

- 1. Mount the fixture onto the mounting plate and secure it in place by installing the fixture screws.
- 2. Screw the shade(s) onto the fixture to complete installation.