ACCORD LIGHTING

1510 E94

E26

ASSEMBLY INSTRUCTIONS

USA & CANADA

WARNING!

Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

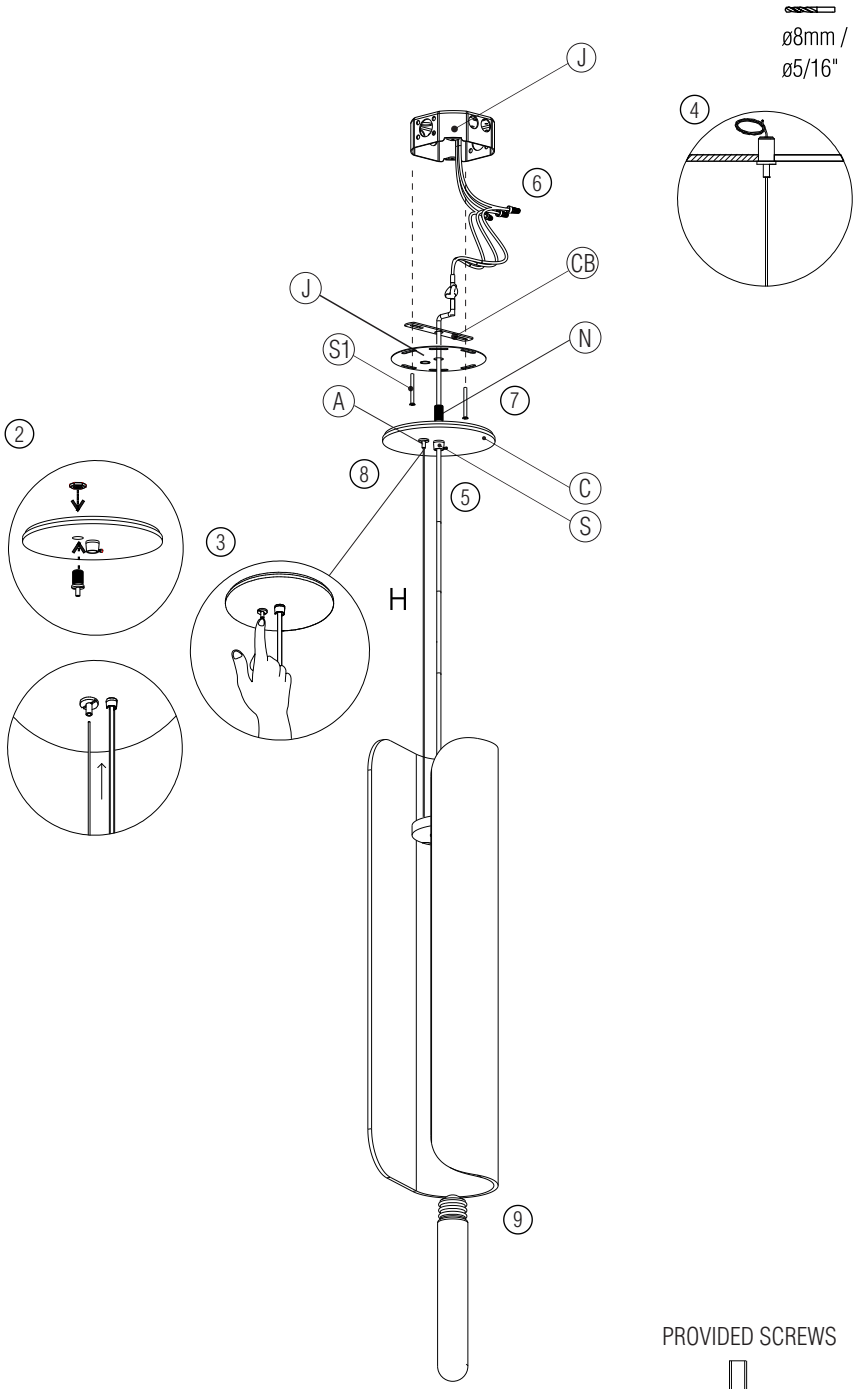

Line: CASCADE
Family: PENDANT
Description: CASCADE ACCORD PENDANT 1510

Imput voltage: 120 - 240V
Input frequency: 60Hz

Material: Natural Wood Venner and MDF.

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

Turn off the electrical power before starting the installation, and keep it turned off until the installation is completed.

1. Remove the protective packaging, taking care not to cut or scratch the wooden pieces.
2. Pass the support steel cable through the small hole in the screw collar loop mounted on top of the luminaire. Ensure the ball-end of the cable stays inside of the loop in order to secure it in place.
3. Using the provided nut, fixate the cable gripper into the canopy, as shown on the picture. Insert the other end of the support steel cable into the adjustable e anchor mounted on the canopy until it is tight.
4. Reserve extra cable by wrapping it inside of the canopy. It is not necessary to cut the excess off, but ensure that the cable cannot touch any of the electrical connections. After the canopy assembly is finished, level the fixture by making adjustments to the length of the cable as shown in the next step.
5. Pass the power supply cable through the strain relief (S), threaded tube nipple (N), canopy (C), junction box cover (J) and crossbar (CB). Adjust the cable length so it is equivalent to the desired heigh for the luminaire to be installed. **(Attention: At this stage, the power cable should be tensioned to align the luminaire properly.)**
6. Make the electrical connections in compliance with all the safety standards and local electrical codes. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.
7. Using the (S1) screws, fixate the crossbar into the junction box.
8. Fixate the threaded nipple into the crossbar through the center hole of the canopy. Bring the canopy close to the junction box (CB), fitting the nipple (N) in its center hole. Using the strain relief (S), fixate them into the nipple. Once its secure, tighten the screw on the strain relief to anchor the power cord.
9. Install an UL Listed E26 LED bulb on the sockets, with a Max 25W wattage.

Turn on the electrical power.

The luminaire is ready for use.

PROVIDED SCREWS

S 1

ATENTION!

FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
Its recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsability of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual.
The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.
See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.