

### WARNING!



Be sure electrical power is OFF before and during installation or maintenance.  
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.  
All LEDS are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.  
Do not alter, relocate or remove any electrical component.


Line: Element  
Family: Pedant  
Description: Pendant Accord Element Cilíndrica

Input voltage: 120 - 240V  
Input frequency: 60Hz

Material: Natural Wood Venner and MDF.


Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

Turn off the electrical power before starting the installation, and keep it turned off until the installation is completed.

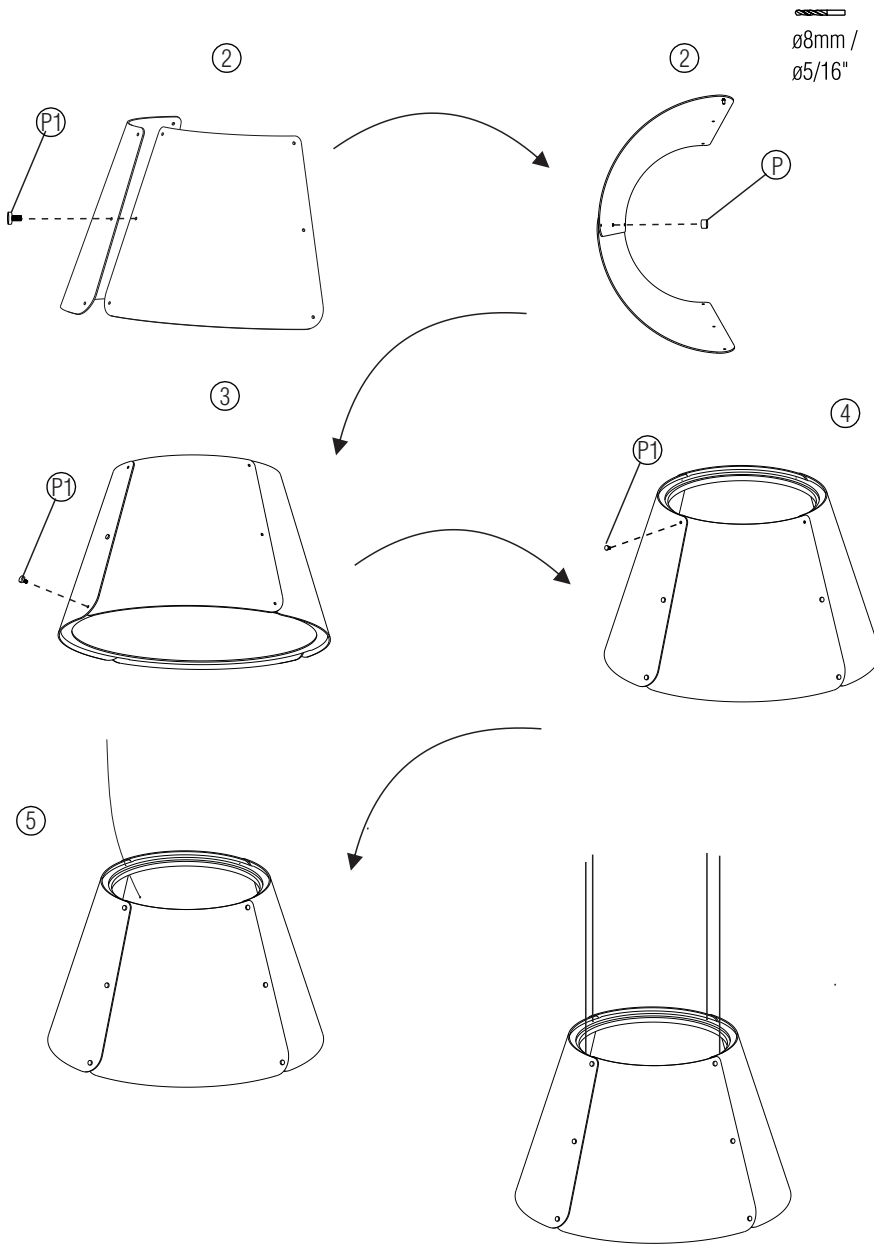

- ① Remove the protective packaging, taking care not to cut or scratch the wooden pieces.
- ② Align the central flange of the two leaves so that they overlap each other, and fasten them using the screw (P1) and the washer (P). Repeat the same process, inserting and fastening the remaining leaves through the central flange.
- ③ Insert base 01 (S1) into the lower part of the piece, aligning the flange of the leaf with the base flange and fastening it using the screw (P1). Repeat this same process on the remaining leaves.
- ④ Insert base 02 (S2) into the upper part of the piece and align the flanges of the leaves with base 02 (S2) and fasten them using the screw (P1). Repeat the same process on the remaining leaves.
- ⑤ Pass the steel cables through the holes in the strap base, leaving the anchoring sphere on the underside to support the pendant. Repeat this process for the remaining steel cables.

### PROVIDED SCREWS



### ATTENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.  
It's recommended to read these instructions completely and carefully before proceeding.

### SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual.  
The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.  
See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.

# WARNING!



Be sure electrical power is OFF before and during installation or maintenance.  
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.


Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.  
All LEDs are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.  
Do not alter, relocate or remove any electrical component.

ø8mm /  
ø5/16"

Line: Element  
Family: Pedant  
Description: Pendant Accord Element Cilíndrica


Input voltage: 120 - 240V  
Input frequency: 60Hz

Material: Natural Wood Venner and MDF.

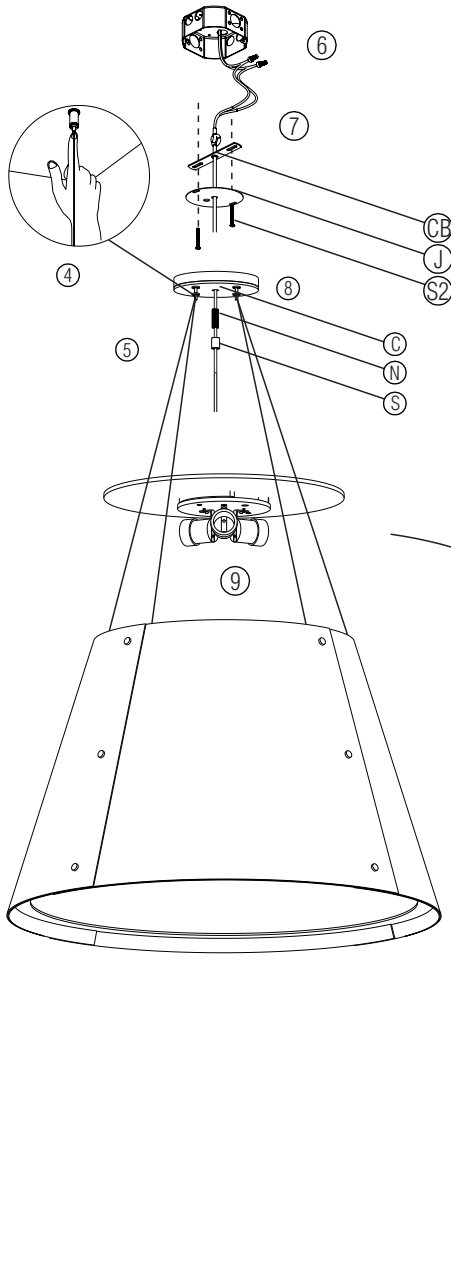

- ④ The other end of the suspension cable shall be inserted at the adjustable cable grippers installed on the canopy. To insert the cable and adjust the height, press the tip of the gripper while simultaneously sliding the cable in. When you release it, the gripper will lock the cable and anchor the fixture. Repeat this process with all the grippers, adjusting the height and leveling the fixture. Reserve the extra cables by wrapping it inside the fixture, and make sure that it does not touch any electrical connections and electrical components.
- ⑤ Pass the power supply cable through the strain relief (S), threaded tube nipple (N), canopy (C) and crossbar (CB). Adjust the cable length so it is equivalent to the desired height for the luminaire to be installed.
- ⑥ Make the electrical connections in compliance with all the safety standards and local electrical codes. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.
- ⑦ Using the (S2) screws, fixate the crossbar into the junction box.
- ⑧ Fixate the threaded nipple into the crossbar through the center hole of the canopy. Bring the canopy close to the junction box, fitting the nipple in its center hole. Using the strain relief, fixate them into the nipple. Once its secure, tighten the screw on the strain relief to anchor the power cord.
- ⑨ Install an UL Listed E26 LED bulb on the sockets, with a Max 25W wattage.

PROVIDED SCREWS



Turn on the electrical power.

The luminaire is ready for use.

# ATTENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.  
It's recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual. The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation. See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.