

1718 W. Fullerton Ave Chicago, IL 60614 Tel: 773-770-1195 Fax: 773-935-5613 www.edgelighting.com info@edgelighting.com M2-\_R-\_ M2-\_C-\_ M2-92S-\_





## Installation Instructions for Pre-Bent Monorail 2 Circuit


#### IMPORTANT INFORMATION

- This product is ETL listed for indoor dry locations.
- Monorail 2 Circuit is bendable horizontally to a radius as small as 6".
- The product is intended to be used with Edge Lighting Monorail 2 Circuit systems only.

**SAVE THESE INSTRUCTIONS!** 




# **Connect the Pre-Bent Monorail 2 Circuit Sections with the Conductive Connectors**

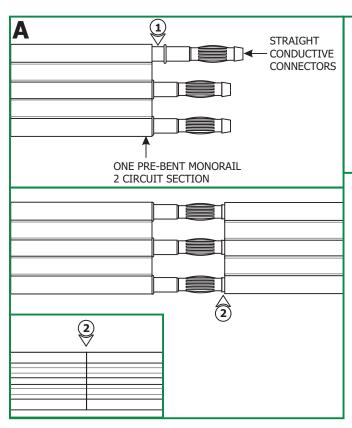


- 1: Push the Monorail 2 Circuit conductive connector pins completely into one pre-bent Monorail 2 Circuit section.

  Make sure this Monorail 2 Circuit section is secured with the standoffs (Refer to the instructions provided with the standoffs).
- **2:** Push the other pre-bent Monorail 2 Circuit section completely onto the Monorail 2 Circuit straight conductive connector pins and simultaneously connect the pre-bent Monorail 2 Circuit to the standoffs.


# Connect the Pre-Bent Monorail 2 Circuit section with the Isolating Connectors

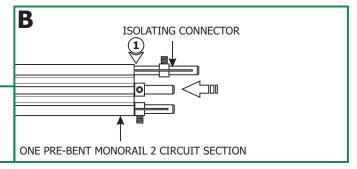

1: Push the straight isolating connectors completely into one pre-bent Monorail 2 Circuit section end. Make sure this pre-bent Monorail 2 Circuit section is secured with the standoffs (Refer to the instructions provided with the standoffs).

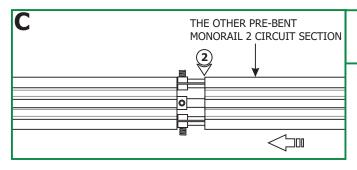


**2:** Push the other pre-bent Monorail 2 Circuit section entirely onto the isolating connectors and simultaneously connect the pre-bent Monorail 2 Circuit to the standoffs.

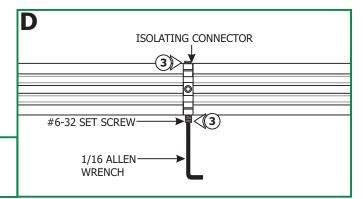


3: Tighten the #6-32 set screw on each of the isolating connectors firmly with the 1/16 Allen wrench. **Do not over tighten the set screws as this may strip the threads.** 

### **Connecting a Pre-Bent Circle Sections**

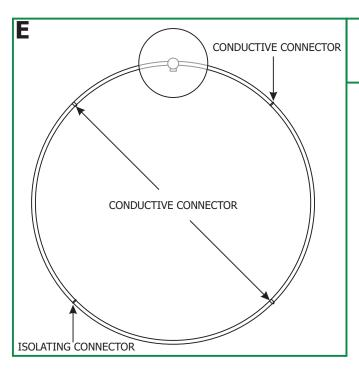

**1: For the Single Power Feed Connection-** Use one set of isolating connectors and the appropriate sets of conductive connectors provided to connect the pre-bent Monorail sections together as a circle.

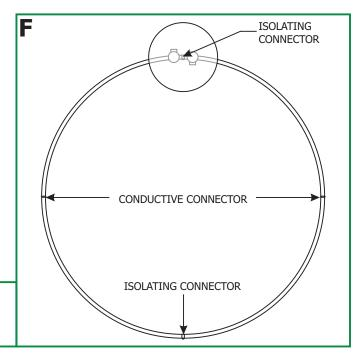

**2: For the Dual Power Feed Connection-** Use two sets of isolating connectors and the appropriate sets of conductive connectors provided to connect the pre-bent Monorail sections together as a circle.