

### Neoteric Lighting Design



# Assembly and Installation Instructions for Model's

Warning please make sure the electrical breaker is shut off


## 501030DW

## **CAUTION - RISK OF FIRE**

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

—K. Cover Plate

J. Glass Shade

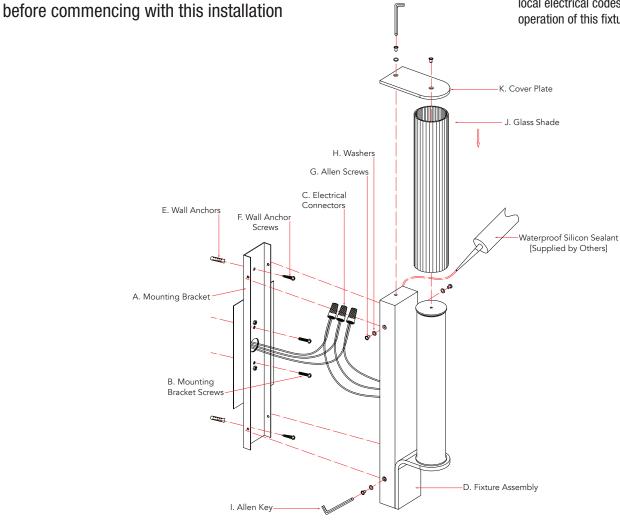

Package Contents		
Part	Description	
Α	Mounting bracket	1
В	Mounting bracket screws	2
С	Electrical connectors	3
D	Fixture assembly	1
Е	Wall anchors	2
F	Wall anchor screws	2
G	Allen screws	6
Н	Washers	5
I	Allen Key	1
J	Glass shade	1
K	Cover plate	1

#### Installing the fixture

please ensure the electrical breaker is in the Off position before commenc-

- Loosely attach the Mounting bracket **(A)** to the Junction Box [Supplied by Others] using the Mounting bracket screws **(B)**. Mark where the Wall anchors **(E)** will be installed. Remove the mounting bracket
- Install the Wall anchors **(E)** into the marked spots and attach the Mounting bracket **(A)** to the Junction Box [Supplied by Others] using the Mounting bracket screws **(B)**. Secure the Mounting bracket to the wall by inserting the Wall anchor screws **(F)** into the Wall anchors.
- Connect the supply wires to the fixture wires using the supplied electrical wire connectors **(C)**. White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- Attach the Fixture assembly **(D)** to the Mounting bracket **(A)** using four of the Washers **(H)**, Allen screws **(G)** and Allen key **(I)** provided.
- Slide the Glass shade **(J)** onto the Fixture assembly **(D)** and secure in place using the Cover plate **(K)** and remaining Allen screws **(G)** and Washer **(H)**.
- 6 Use a waterproof Silicon Caulk [Supplied by Others] to seal the Fixture to the wall.
- 7 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.

