



# a

## emotional light

anel collection

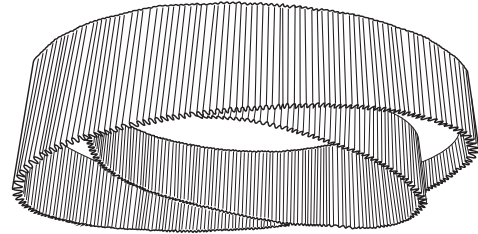

7,8in

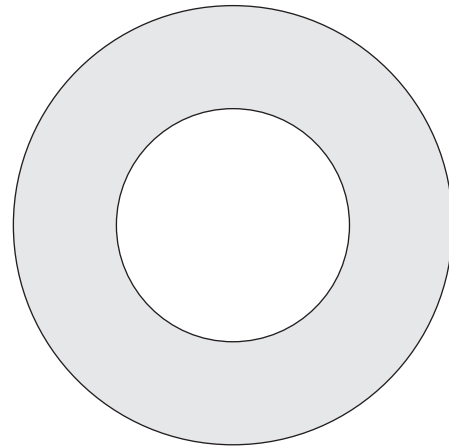

Ø 13,8in

Ø 23,6in

USA & Canada

ref. AN05



AN04



AN05

### MATERIALS & COMPONENTS

#### LAMPSHADE

Painted stainless steel | One color



BL




CUSTOM  
COLOR

Steel painted in white

Difusser included

#### LIGHT SOURCE BUILT IN

120-277V - 60Hz

 STRIP 30W 2700K 3540lm built-in  
Dimmable 0-10V

### OTHER DATA

#### NET WEIGHT

39 lb

#### PACKAGING

28,3x28,3x11,8 in  
48,8lb

#### ELECTRICAL FEATURES



#### CERTIFICATIONS




## Anel

ref. AN05

Suitable for indoor use, at 25°C

Apta para uso interior a temperatura ambiente de 25°C



LED

0-10V

Box contains | Contenido de la caja:

**A** - Lampshade | Tulipa [1]

**B** - Support | Soporte [1]

**C** - Canopy | Florón [1]

**D** - Piece to clamp | Piezas de sujeccion [3]

**SAFETY NOTE:** Switch off mains supply before commencing installation

**INDICACIÓN DE SEGURIDAD :** Desconecte la alimentación eléctrica antes de empezar la instalación


### 1



**ATTENTION!** follow the unpacking and installation instructions as strictly as possible so that the final result is as expected.

**MUY IMPORTANTE:** respetar las instrucciones de desembalaje e instalación lo más rigurosamente posible para que el resultado final sea el esperado.

2

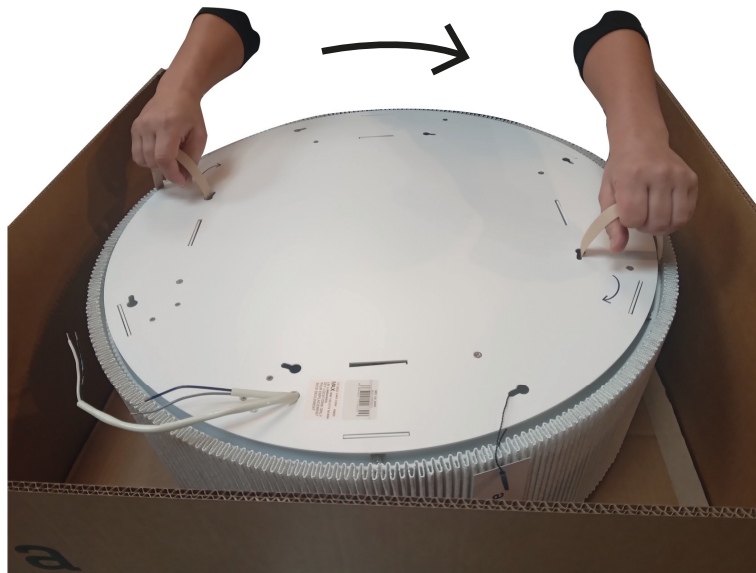


Take the support by the straps and turn clockwise to release it from the lampshade.

Lift the electrical support very carefully and without touching the LEDs.

Coger el soporte por las cintas y girar en el sentido de las agujas del reloj para soltarlo de la tulipa.

Levante el soporte eléctrico con mucho cuidado y sin tocar los leds.

### 3

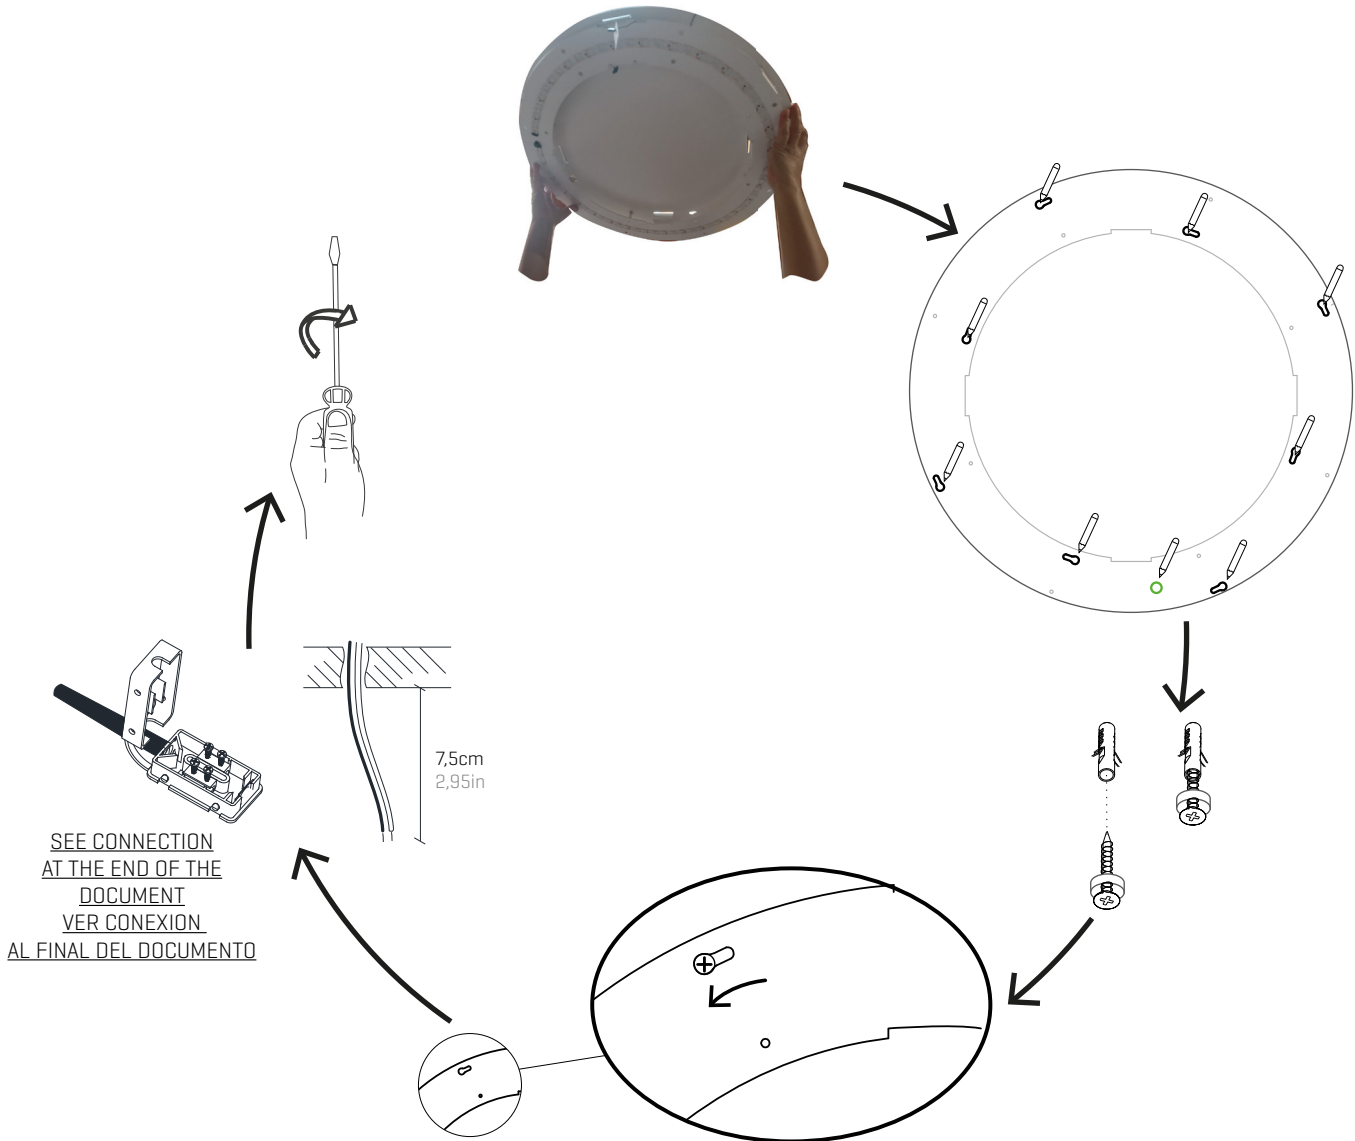

Lift the electrical support very carefully and without touching the LEDs.

The green dot indicates where the entrance is to make the electrical connection, take this into account when positioning the support.  
Mark the 8 keyholes and the power inlet with a pencil.

In these 8 points, drill the holes to place the nylon plug, also screw in the screws, leaving them protruding about 15-20mm.  
The plug should be touching the wall to leave room to pass the cables.

Match the 8 screws to the keyholes and rotate so that the screw heads are in the narrow part of the keyhole.

Pass the electrical cable inside the support to make the connection.

Tighten the 8 screws from the bottom plate with a screwdriver to properly fix the bracket to the ceiling.

Levante el soporte eléctrico con mucho cuidado y sin tocar los leds.

El punto verde indica donde está la entrada para realizar la conexión eléctrica, tengalo en cuenta a la hora de posicionar el soporte.  
Marque con un lápiz las 8 bocallaves y la entrada de corriente.



En esos 8 puntos realice los taladros para colocar el taco de nylon, enrosque también los tornillos dejándolos salientes unos 15-20mm  
El taco debe quedar tocando la pared para dejar espacio para pasar los cables.

Haga coincidir los 8 tornillos con las bocallaves y girelo para que las cabezas de los tornillos queden en la parte estrecha de la bocallave.

Pase el cable eléctrico al interior del soporte para poder realizar la conexión.

Apriete los 8 tornillos desde la chapa inferior con un destornillador para fijar correctamente el soporte al techo.

### 4



#### UNPACKING THE LAMPSHDE

Untie the cord that holds the lampshade to the box.

Remove the inner cardboard die.

Remove the die from the base.

Pull the lamp over the tape

**IMPORTANT:** Never grab the shade by the painted mesh, it could become deformed.

#### DESEMBALAJE DE LA TULIPA

Desate el cordón que mantiene sujeta la tulipa a la caja.

Retire el troquel de cartón interior.

Retire el troquel de la base.

Tire la lámpara por la cinta

**IMPORTANTE:** Nunca agarre la tulipa por la malla pintada, podría deformarse.

Until the luminaire is fully installed, always handle it with the cardboard die.  
Hasta que la luminaria esté totalmente instalada manipulela siempre por el troquel de cartón.

### 5



Locate the label and the two tabs marked with a dot, the lampshade has a position.

Fit all sets of tabs (inner and outer) into the sockets and rotate the shade to secure it.

Make sure all the tabs fit inside their socket.

Localice la etiqueta y las dos pestañas marcadas con un punto, la tulipa tiene posición.

Haga encajar todos los conjuntos de pestañas (interiores y exteriores) en los encajes y gire la tulipa para que quede sujeta.

Asegúrese de que todas las pestañas queden dentro de su encaje.

### CONNECTION

Ce luminaire comprend un système de régulation 0-10V, utilisez les câbles de couleur violet [+] et gris [-] pour réaliser la connexion.

Esta luminaria incluye sistema de regulacion 0-10V, utilice los dos cables de colores violeta [+] y gris [-] para realizar la conexión.

