

# C33814/C33818

## INSTALLATION INSTRUCTIONS SHEET

### START FROM HERE

- Make sure power is completely off at the fuse box.
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in clear area.
- Wear gloves at all times during this installation.
- Read instructions carefully before you start assembly.
- Keep this instruction sheet for future reference.


**Technical Support:** 1-844-628-8368

### Please Note:

- All Matteo Lighting fixtures come with pre-wired module(s).
- Unless instructed to do so, please do not touch any part of the module(s) as any unnecessary contact with the module could cause permanent damage.

THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED IN A JUNCTION BOX

CE LUMINAIRE DOIT ÊTRE MONTÉ OU SUPPORTÉ DANS UNE BOÎTE DE JONCTION

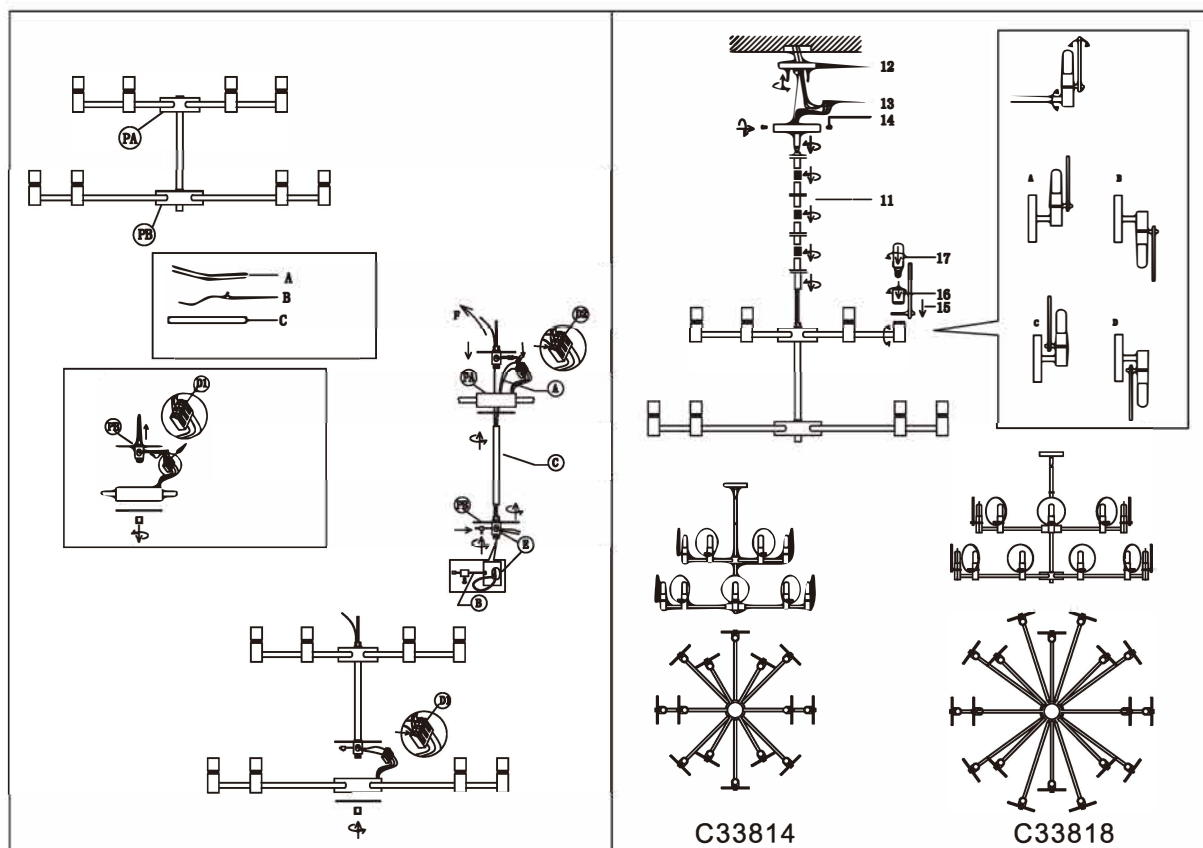

- Ensure main supply is switched off
- Take A&B&C out from the accessory pack.
- Loosen the bottom cover of PA on the top layer, fit cable A into D2.
- Make sure cable A through rod C then fix tightly onto PA.
- Take off both the bottom and top cover of PB then remove the power cord from D1.
- Make sure cable A through the top cover of PB then fix tight onto rod C.
- Make sure the stainless steel cable B through E and rod C then come out from the canopy.
- Put the bottom frame onto the top cover of PB then use finials to fix the bottom cover tightly.
- Use screws to fix the mounting bracket onto junction box.
- Connect wires according to colour (White to White, Black to Black), connect all earth lug together onto the crossbar with green screw to tight.
- Use screws to fix the canopy onto the mounting bracket.
- Put the glass on the frame then use sleeve to fix.
- Install the lamps.
- Reconnect power.
- Light source: E12 LED 10W Max (bulbs not included)

### WARNING:

- This fitting must be earthed.
- Disconnect power and allow fitting to cool down before cleaning or changing the lamp.