


# Glyph Sconce

19471 rE

Low Voltage



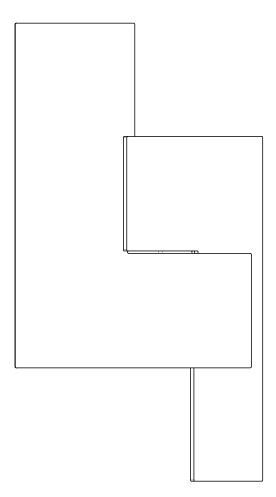

### **CAUTION:**

Before starting, turn off power at main circuit panel.

### ADVERTENCIA:


Antes de comenzar la instalación, apague la corriente en el tablero principal.

### ATTENTION:

Coupez l'alimentation avant de proceder à l'installation.




Calling for backup? Scan above to contact our team.




www.RBW.com +1 212 388 0399 support@RBW.com © 2023, RBW Studio LLC

# What's Included: Part Configurations May Vary

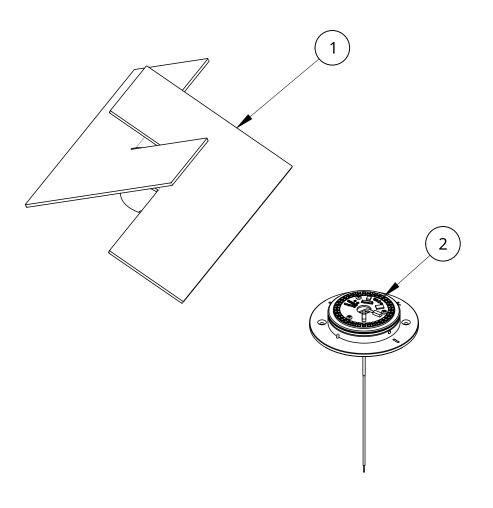


Item	Qty	Description
1	1	Package: Glyph Panel Assembly. IP65
2	1	Package: Glyph Module. IP65. Standard DC LED

Driver dimensions and location may vary, consult your order confirmation for details.

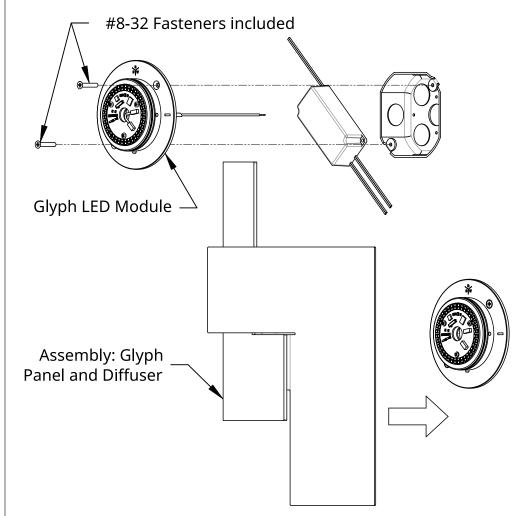

### **Installation - Glyph LED Module**

- 1. Connect Red (+) and Black (-) Sconce wires to low voltage leads from externally located driver.
- 2. Fix LED Module Assembly to desired mounting surface with included or appropriate fasteners.
- 3. Carefully Place Panel and Diffuser Assembly over center of LED Module.

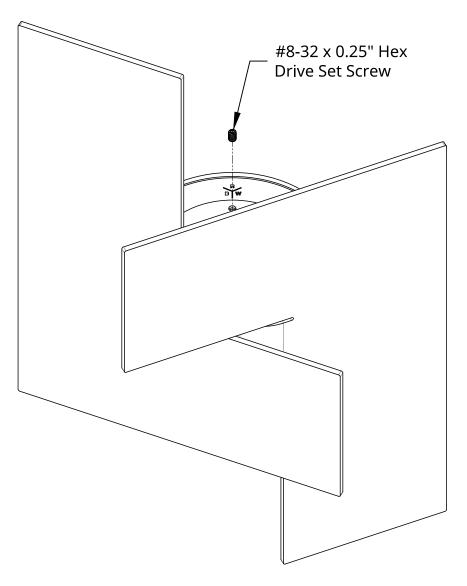

# **Installation - Glyph Panel and Diffuser**

- 4. Firmly press Panel and Diffuser Assembly onto LED Module ensuring Module O-Ring is not pinched or blocking set screw hole.
- 5. Fasten #8-32 Set Screw into hole to secure Panel and Diffuser Assembly.
- 6. Congratulations! End of guide.


Page intentionally left blank



# Glyph Sconce

19470 rF

**AC Input** 

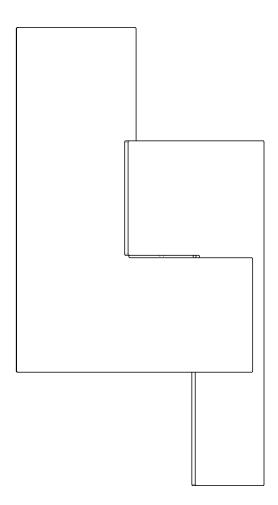



### **CAUTION:**

Before starting, turn off power at main circuit panel.

### **ADVERTENCIA:**


Antes de comenzar la instalación, apague la corriente en el tablero principal.

### ATTENTION:

Coupez l'alimentation avant de proceder à l'installation.




Calling for backup? Scan above to contact our team.




www.RBW.com +1 212 388 0399 support@RBW.com © 2023, RBW Studio LLC

# What's Included: Part Configurations May Vary

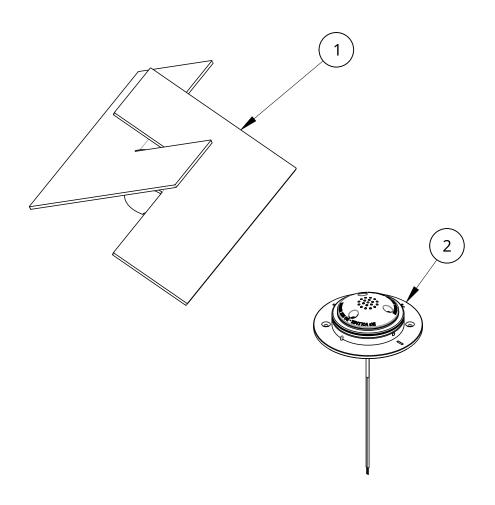


Item	Qty	Description
1	1	Package: Glyph Panel Assembly. IP65
2	1	Package: Glyph Module. IP65. Standard AC LED

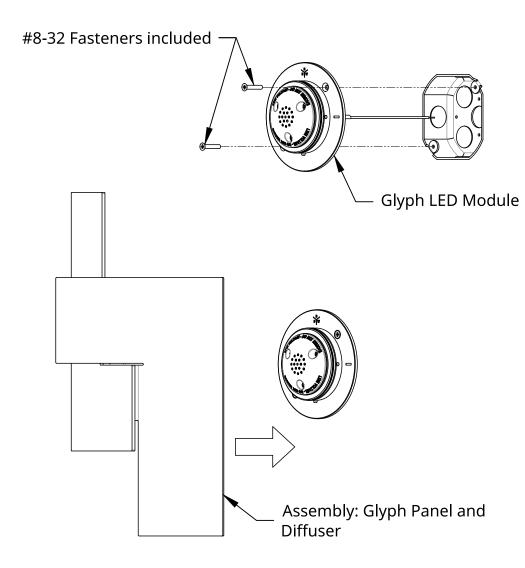

### **Installation - Glyph LED Module**

- 1. Connect Black (L) and White (N) Sconce wires to power feed.
- 2. Fix LED Module Assembly to desired mounting surface with included or appropriate fasteners.
- 3. Carefully Place Panel and Diffuser Assembly over center of LED Module.

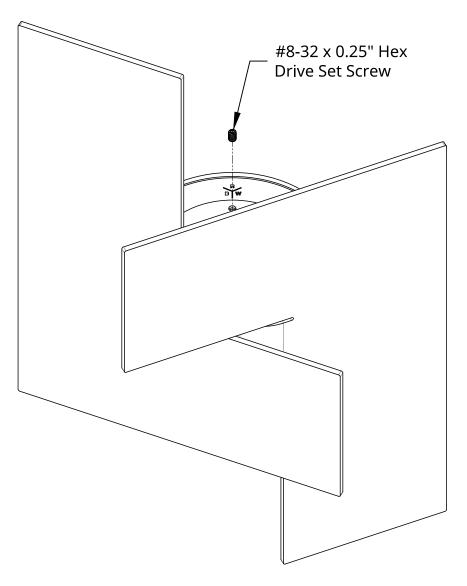

# **Installation - Glyph Panel and Diffuser**

- 4. Firmly press Panel and Diffuser Assembly onto LED Module ensuring Module O-Ring is not pinched or blocking set screw hole.
- 5. Fasten #8-32 Set Screw into hole to secure Panel and Diffuser Assembly.
- 6. Congratulations! End of guide.

Page intentionally left blank